



□□ □□

□□	SFENG
□□ □□	SF-P020-B
□□	□□ □□ □□ □□ □□
□□ □□	7 □ □□□□□ □

□□ □□



# SF-P020

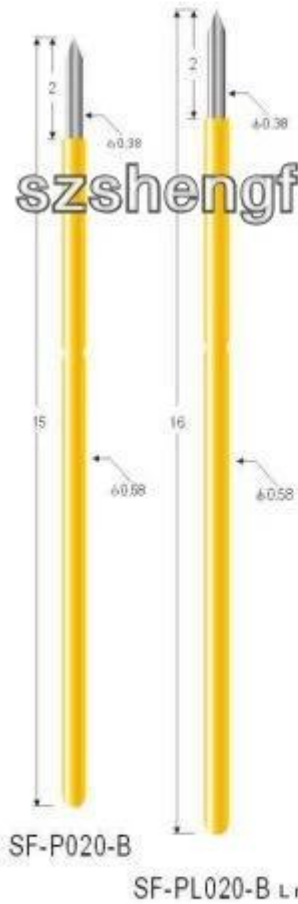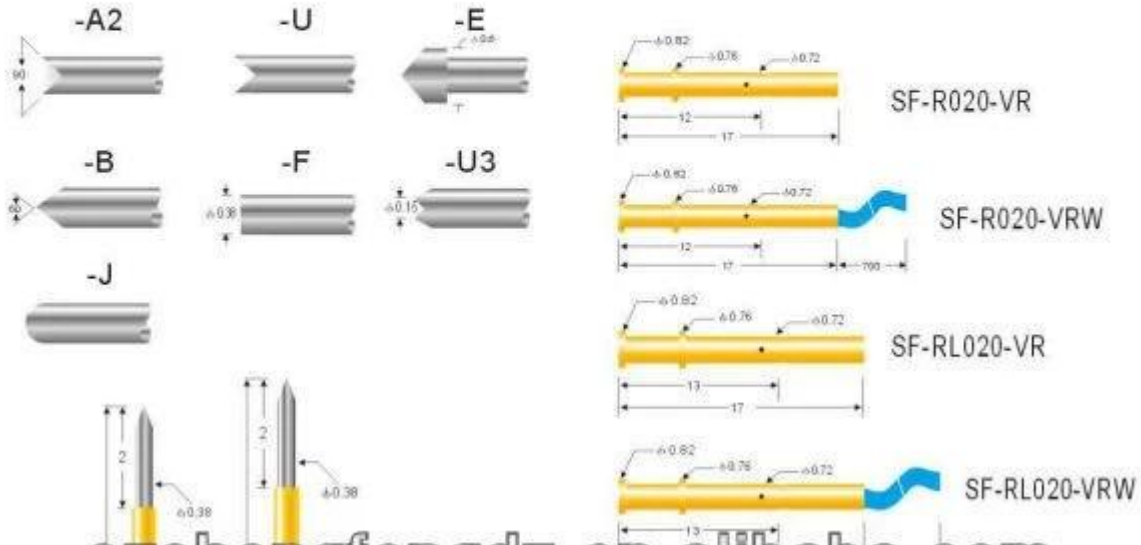

## Probe specifications SF-P020 PL020 (技术规格)

- Recommended minimum Spacing(最小间距): 1.0mm(.0394 ")
- Mounting hole size(钻孔尺寸): 0.75mm(.0295 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 80g(克)
- Materials and finishes(材料及涂饰):  
Plunger:SK4, Ni plated  
Barrel:Phosphor bronze,Gold plated  
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 120m $\Omega$ (毫欧姆)

### Receptacle specifications

Materials and finishes: Phosphor bronze,  
Gold plated

□□□ □□□

1. □□□ □□ □ □ □□□□ 24 □□ □□ □□□ □□.
2. □□□ □□ □□□□ □□□□, OEM□ □□□□□.
3. □□□ □□ □ □ □□□□ □□ □□□ □□□ □□□ □□□ □□□ □.

4. 0000 00 0 0 0000 0000 0000 00 0000 0000 00 00.

00 00

PCB, ICT, FCT 0000 00000 000000 0 (000);

00 0 (0000) 0000 00 00 00 0000 0000 000000, 00 00, 0000, 0000 & A; 00 00 00 00000;

BGA 0000 00000000 00 00 0000;

0000 00 0, 00 0, QZ 0 VZ 0000 LM 0;

00 00 000, 0000 0000, 00 00 00;

0000 & A; 00 / 00;

00 00 00 00, 30 # OK 0000, 00 00 00, POM, 0 00 0