




**SFENG**  
The China's The World's



[WWW.SF-PROBE.COM](http://WWW.SF-PROBE.COM)

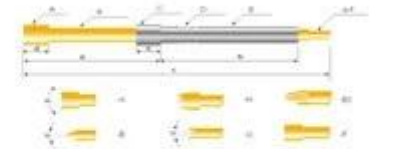

Size	SF-PH10	SF-PH12	SF-PH18	SF-PH23	SF-PH32	SF-PH45
A	1.20	1.30	2.00	2.50	3.50	5.00
B	0.75	0.95	1.25	1.80	2.50	3.50
C	1.20	1.30	2.00	2.50	3.50	5.00
D	0.80	1.04	1.33	2.31	3.21	4.55
E	0.80	0.27	1.71	2.27	3.17	4.55
F	0.47	0.56	0.79	1.25	1.81	2.45
a	7.0	20.0	28.0	38.0	38.0	35.0
b	9.3	23.0	34.0	45.0	45.0	42.5
c	20.5	27.0	36.0	48.0	48.0	40.0
d	1.0	2.0	2.0	3.0	3.0	4.0
e	1.0	2.0	2.0	3.0	3.0	1.5
Full travel of spring	3.5	6.0	8.3	10.3	10.0	10.5
Mounting Size	1.01/0.01	1.37/0.01	1.81/0.01	2.32/0.01	3.27/0.01	4.60/4.7
Plungerhead Mini Spacing	1.70	3.00	2.50	3.00	4.20	5.50
Spring force	150g	150g	150g	150g	200g	250g
Material of plunger	Phosphor Bronze lead wire	Phosphor Bronze Substrate	Phosphor Bronze lead wire	Phosphor Bronze lead wire	Phosphor Bronze lead wire	Phosphor Bronze lead wire
Connection of receptacle	Solder cup	Solder cup	Solder cup	Solder cup Terminal	Solder cup Terminal	Solder cup Terminal

□□□ □□□

1. □□□ □□ □ □ □□□□ 24 □□ □□ □□□ □□.
2. □□□ □□ □□□□ □□□□, OEM □ □□□□□.
3. □□□ □□ □ □ □□□□ □□ □□□ □□□□ □□□ □□□ □.
4. □□□ □□ □ □ □□□□ □□□ □□□□ □□ □□□ □□□ □□ □□.

□□ □□

PCB, ICT, FCT □□□ □□□□ □□□□□ □ (□□);

□□ □ (□□□) □□□ □□ □□ □□ □□□ □□□□□, □□ □□, □□□, □□□ & A; □□ □□ □□ □□□□;

BGA □ □□□□□□ □□ □□ □□□;

□□□ □□ □, □□ □, QZ □ VZ □□□ LM □;

□□ □□ □□□, □□□ □□□, □□ □□ □□;

□□□ & A; □□ / □□;

□□ □□ □□ □□, 30 # OK □□□, □□ □□ □□, POM, □ □□ □