

☐☐ ☐ SF-PPA9.0 * 29-G


☐☐ ☐☐

☐☐	SFENG
☐☐ ☐☐	☐☐ ☐ SF-PPA9.0 * 29-G
☐☐	☐☐
MOQ	100 ☐
☐☐ ☐☐	☐☐☐☐ ☐☐ ☐☐ 7 ☐☐ ☐

☐☐ ☐☐

SFENG
The China's The World's



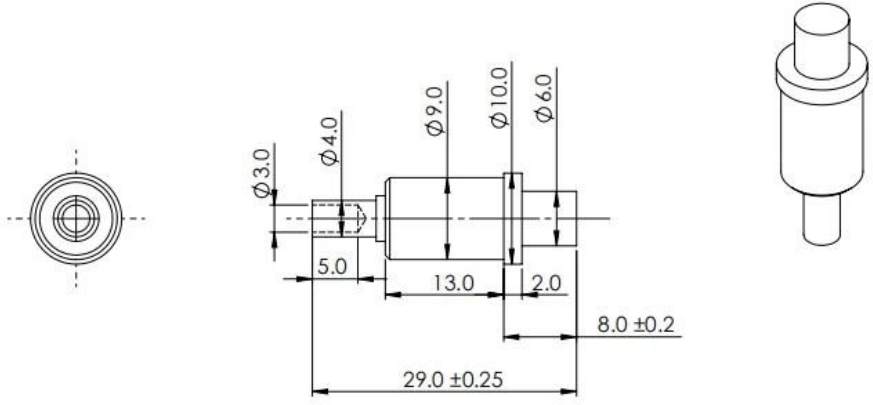

Material:
 Barrel: Brass, Ni Plated
 Plunger : Brass, Au on Ni plated
 Spring : SUS

Specifications:
 Current Rating : 10A
 Full stroke: 6mm
 Rated stroke : 4mm
 Spring force: 320 +/-10% @load 4mm.

□□□ □□□

1. □□□ 24 □□ □□ □□ □□ □□.
2. □□□ □□□ □□□□ □□□□ □□□□ OEM □ □□□□□.
3. □□□ □□ □ □□ □□□□ □□□ □□□ □□ □ □ □□□□.
4. □□□ □□□ □□□□□□□□ □□□ □□□ □□ □□□ □□□□ □□□□ □□□□ .

□□ □□

PCB, ICT, FCT □□□ □□□□ □□□ □□ □ (□□);
 □□, □□ □□, □□□, □□□ □ □□□□□ □□□□□□□ □□ □ □□ □□ □□ □□ □□□ □□ □ (□□□);
 BGA □ □□□ □□□□□□ □□ □□ □□□;
 □□□□□ □□ □, □□ □, QZ □ VZ □□□□ LM □;
 □□□ □□□, □□□ □□□, □□□□□ □□;
 □□□ □ □□□□ / □□;
 □□ □□ □□ □□, 30 # OK □□□, □□ □□ □□, POM, □ □□ □

□□ □□



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

