


00 00

0000 00	SF3028
00	000:C3604 00: 00, PEEK 0: SUS304
0000 0	470g
00 0000	6.6mm
00 000	10A
00	<10mΩ

00 00

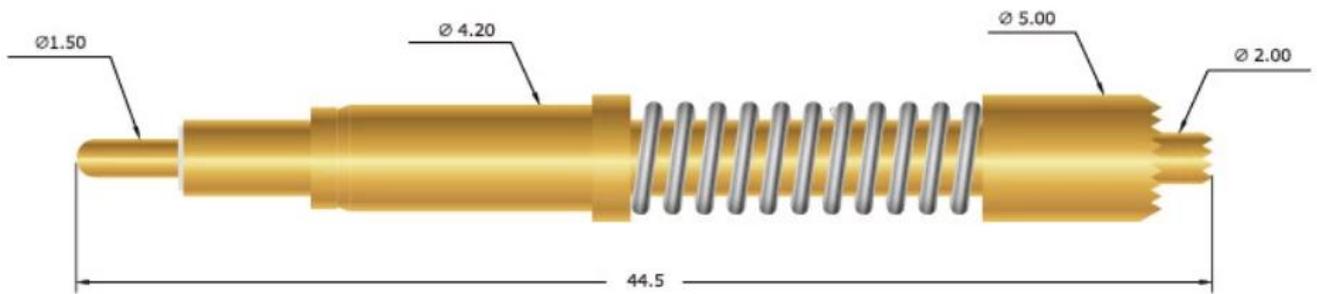

0000 0000

1. 0000 2400 000 000000 0000 0000.
2. Customized 00000 000000, OEM 000000
3. 000 00000 0 00 00000 0000 00 000000.
4. 0000 00000 00 0000 0000000.

00 00


- PCB, ICT, FCT 0000 00 00 0000 00 0(00);
- 00 0(0000) 0000 (00 00) 0000 000000.
- 00, 00 00, 0000, 0000 0 0000 00 00 00 20
- 00 00000 00000;
- 00 0000 00 BGA 0 0000 0000;
- 0000 00 00 0, 00 0, QZ&VZ 00000 00 LM 0;
- 0000 0000, 0000 0000, 000000 00...
- 0000 0 0000/00;

---□□ □□ □□ □□, 30#OKwire, □□ □□ □□, POM, Ironhinge □

□□ □□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□ □□

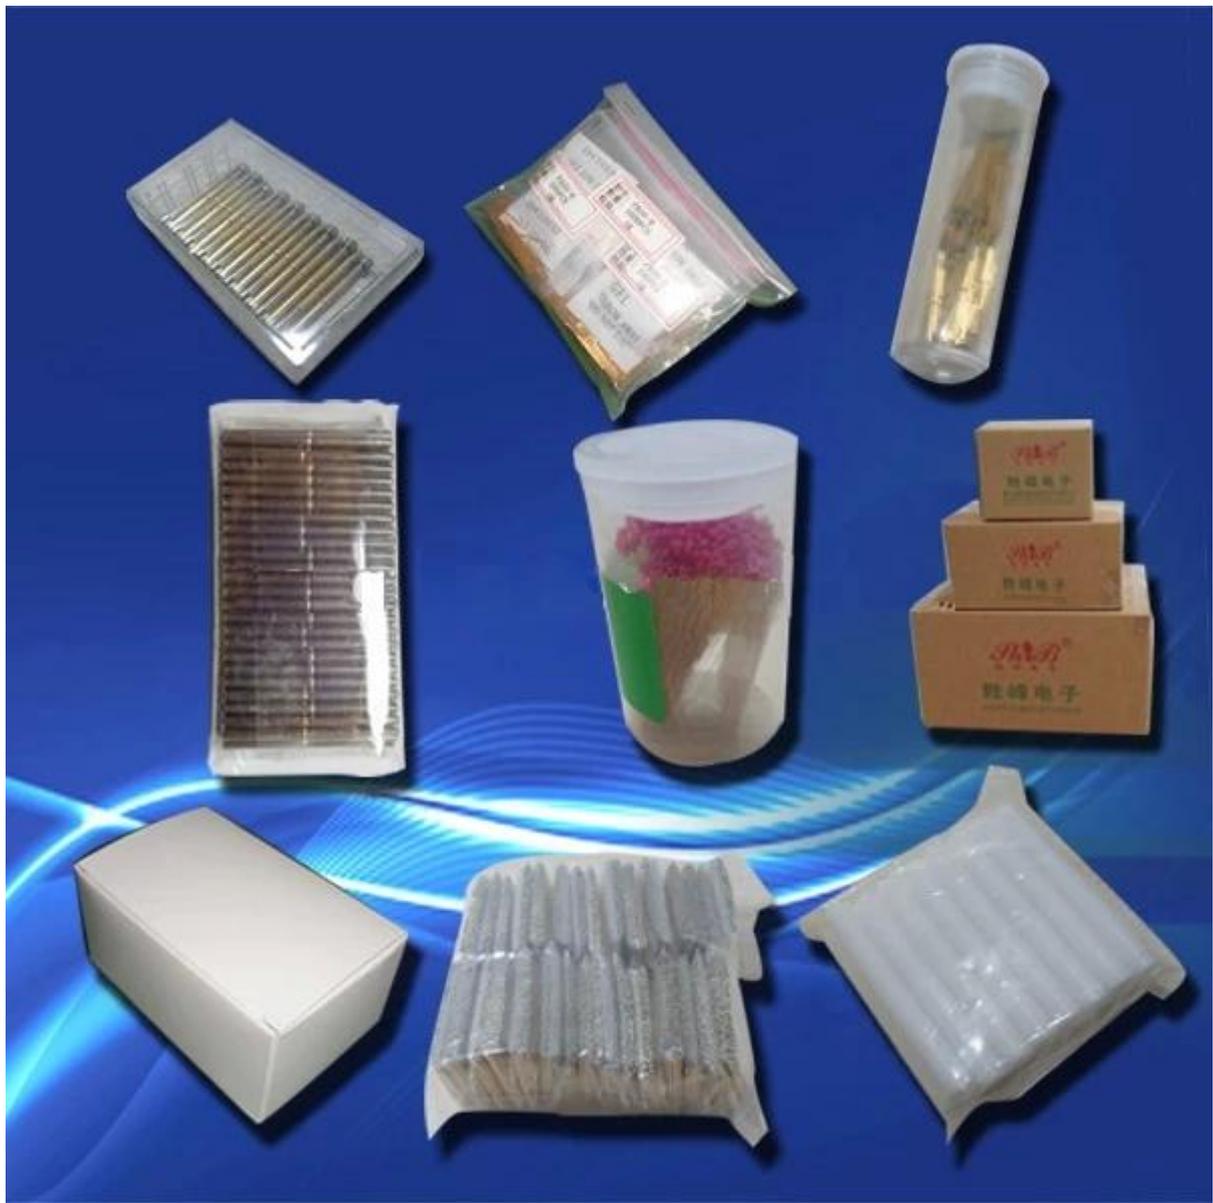

□□ □□

