



□□ □□

□□	SFENG
□□ □□	SF-P160
□□	□□ □□ □□ □□ □□
□□ □□	7 □ □□□□□ □

□□ □□



# SF-P160

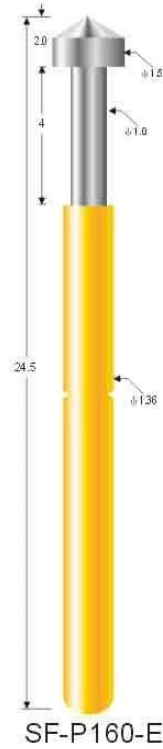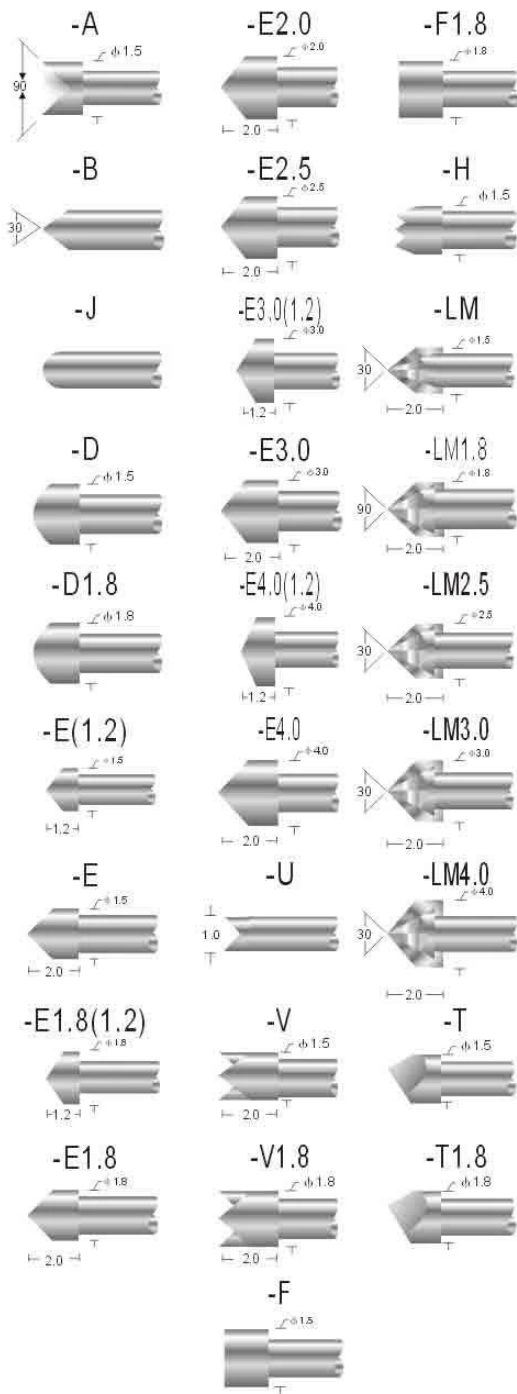

## Probe specifications SF-P160(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000 ")
- Mounting hole size(钻孔尺寸):  
压克力: 1.70mm(.0670 ")  
电木板、玻璃纤维板: 1.75mm(.0689 ")
- Full travel(行程): 4.0(.1575 ")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):  
Plunger: Be Cu, Rh plated; SK4, Rh plated  
Barrel: Brass, Gold plated  
Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ (毫欧姆)

□□□ □□□

1. □□□ □□ □ □ □□□□ 24 □□ □□ □□□ □□.
2. □□□ □□ □□□□ □□□□, OEM □ □□□□□.

3. 000 00 0 0 0000 00 000 0000 000 0000 000 0.

4. 000 00 0 0 0000 000 0000 00 000 000 00 00.

00 00

PCB, ICT, FCT 000 0000 00000 0 (00);

00 0 (000) 000 00 00 00 000 000 00000, 00 00, 000, 000 & A; 00 00 00 0000;

BGA 000 0000000 00 00 000;




000 00 0, 00 0, QZ 0 VZ 000 LM 0;

00 00 000, 000 000, 00 00 00;

000 & A; 00 / 00;

00 00 00 00, 30 # OK 000, 00 00 00, POM, 0 00 0

00 00

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
