

□□

□□	SFENG
□□	□□□ □□□ SFM165
□□□	□□□ □□
□□	□□
□	□□□□□
□□□ □	□□□
□□ □□	5.3mm
□□ □□	□□
□□ □□	□□
□□	□□
□□ □□	□□
MOQ	100
□□ □□	□□ □□ □ 7 □

□□ □□□



SFENG
The China's The World's




□□□ □□□ □□□ □□□



SF-M165

可选用的针头形式					
材料	针头类型	针头 电镀	特殊版本		
			φ	φ (inch)	
AU	A	φ 2.0	A		
AU	B	φ 0.65	A	0.8	1.0
AU	B1	φ 0.8	A		
AU	H	φ 1.3	A	1.5	2.0
AU	H1S	φ 1.2 (2.0)	A		
AU	H2S	φ 1.4 (2.5)	A		
AU	J	φ 0.65	A	0.8	1.0
AU	D	φ 1.3	A	1.4	1.8
AU	J1	φ 0.65	A		
AU	G	φ 0.8	A	1.0	
AU	G1	φ 1.5	A	1.8	2.0
AU	G2	φ 0.65	N		
AU	G3	φ 0.8	A		
AU	V	φ 1.3	A	1.8	2.0
AU	T	φ 1.8	N	2.0	
AU	LM	φ 1.15	N	1.75	2.0
AU	Q	φ 1.8	N		
AU	U	φ 1.0	A	1.3	

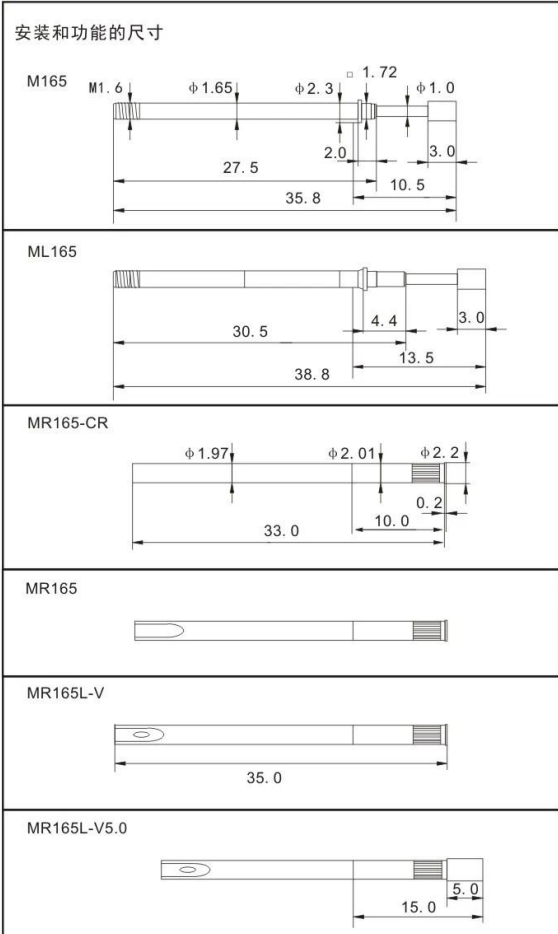

用来测试电缆束的探针
螺钉，螺丝 螺纹设计
可用的螺旋工具

技术参数

间距: 2.54 mm/100mil
 全行程: 5.30 mm
 工作行程: 4.00 mm
 预装弹力: 0.30/0.40/0.50/0.70/1.00/1.00 N
 在工作行程下的弹力: 0.70/1.00/1.50/2.25/3.00/5.00 N

电气数据

电流: 5.0..8.0 A
 电阻: ≤25 mOhm

材质

针管: 黄铜, 镀金
 弹簧: 不锈钢
 针杆: 镀铜, 镀金
 套管: 黄铜, 镀金

推荐的钻孔直径

HP2361.1 (保温, 隔热材料) 2.00 mm
 HGW2372 (玻璃棉, 玻纤棉) 2.03 mm



- 2. 鋼材 鋼 鋼鋼鋼鋼.
- 3. 鋼 鋼 鋼 鋼 鋼 鋼.
- 4. 鋼鋼鋼 鋼 鋼.

鋼 鋼

PCB, ICT, FCT 鋼鋼鋼 鋼鋼鋼鋼 鋼 (鋼);

鋼, 鋼鋼鋼, 鋼鋼, 鋼鋼 鋼 鋼鋼鋼鋼鋼 2 鋼 鋼 鋼 鋼 鋼鋼 鋼鋼 鋼鋼鋼鋼鋼 鋼鋼 鋼 (鋼鋼); 鋼 鋼 鋼鋼鋼鋼鋼;

BGA 鋼 鋼鋼 鋼鋼 鋼 鋼 鋼鋼;

鋼 鋼 鋼鋼 鋼, 鋼鋼 鋼, LM 鋼 QZ 鋼 VZ 鋼鋼;

鋼鋼 鋼鋼, 鋼鋼 鋼鋼, 鋼鋼鋼 鋼;

鋼鋼 鋼鋼; 鋼 / 鋼;

鋼 鋼 鋼 鋼, 30 # OK 鋼, 鋼 鋼, POM, 鋼 鋼 鋼

鋼 鋼



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products




6. Packing

鋼 鋼



1. Agilent current testing

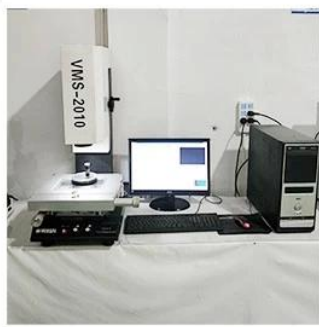

2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

