
□□□ SF-1.65 BY 44.6-G

000 000 00	□□□ □□□ SF-1.65 BY 44.6-G
000 00	BeCu, [][]
00 00	
00 0	BeCu, [][]
000 00	SWP, 00 00 0 0,
000 0	300 ± 20 % gf @ [] 4.0mm [] [][]
0 0000	5.0mm
000 00	1.5 ± 0.2mm



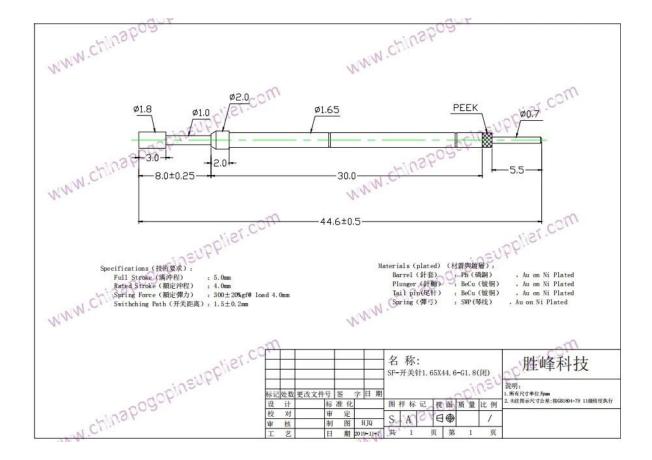


- $1.\ 000\ 24\ 00\ 00\ 000\ 000\ 000\ 00\ 0\ 0\ 0$
- 2. Customizeddesign \square \square OEM \square \square \square

 $BGA \ \square \ \square\square\square \ \square\square\square \ \square \ \square\square \ \square\square\square;$



1. Agilent current testing



2. Quadratic element



3.Load Curve Meter



4.Bond Test



5.Life Fatigue Test



6.Microscope

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.













