

00 00

|          |                        |
|----------|------------------------|
| 00       | SFENG                  |
| 00 00    | SF-P030-               |
| 000      | 00 00 Becu, 0 00 00 00 |
| 0        | 00, 0 00 00 00         |
| 0        | SK4, 00 000            |
| 0 00     | 60g                    |
| 00 00    | 2.0MM                  |
| 00 00    | 1A                     |
| 00 00    | 150mΩ 0                |
| 00       | 0.9                    |
| 00 00 00 | 0 0.65mm               |
| MOQ      | 100 0                  |
| 00 00    | 7 0 00000 0            |

00 00

胜峰探针  
**SFENG**  
The China's The World's

RoHS

QUALITY ASSURED FIRM  
**ISO 9001**  
SGS

CE


chinapogopinsupplier.com

## Probe specifications SF-P030 PL030(技术规格)

- Recommended minimum center(最小间距): 0.90m(.0354 " )
- Mounting hole size(钻孔尺寸): 0.65mm(.0256 " )
- Full travel(行程): 2.0(.0787 " )
- Spring force(弹簧压力): 60g(克)
- Materials and finishes(材料及涂饰):  
Plunger:SK4,Rh plated  
Barrel:Phosphor bronze,Gold plated  
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 150mΩ(毫欧姆)

### Receptacle specifications

Materials and finishes: Phosphor bronze,  
Gold plated

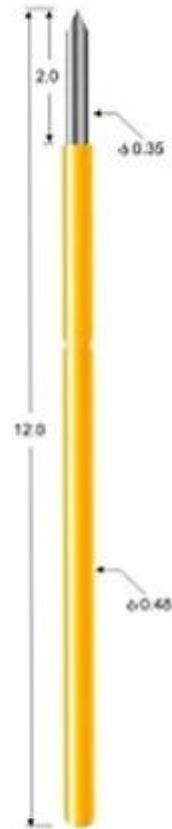

SF-P030-B

□□□ □□□

24 □□ □□ withn □□ 1.Reply

2.Customized □□□□ □□□□, OEM □□

□□□ □□□□ □ □□ □□□□ □□□ □ 3.Delivery

□□□ □□□□ □□ □□ □□ □□□ 4.provide

□□ □□

--- □ PCB, ICT, FCT □□□□□□ (□□) □□□□□□ □;

--- □□ □ (□□□) □□□ (usuallytemporary) □□□ □□□□□

□□ □ □□ □□ □□ □□, □□, □□□, □□□ & A;

interconnectApplications;

semiconudtion □□□; --- □□ orBGA & A□ probef □□;







--- □□□ □□ □, coatingpin, LM □ withQZ & A; VZseries;

--- □□ □□ □□□, □□□ □□□, □□ □□ ...

--- □□□ & A, □□ / □□;

--- □□ □□ □□ compents, 30 # OKwire, □□ □□ □□, POM, Ironhinge □

□□ □□

| Spring exhausted tester   | DC power supply   | Current resistance tester  |
|---|---|--|
|   |   |   |
| Microscope  | Tensile strength tester   | Spring tester  |
|  |  |  |

□□ □□

