





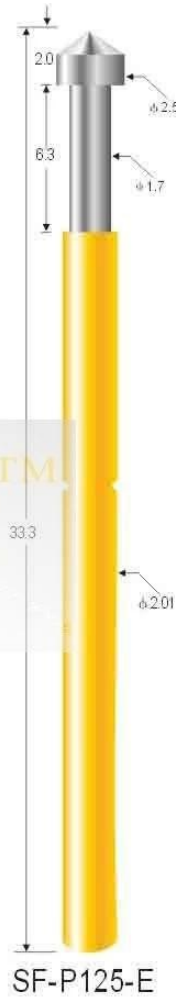
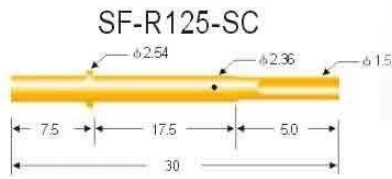
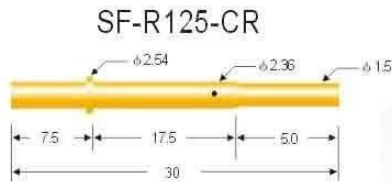
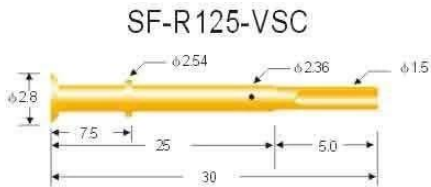


□□ □□

□□	SFENG
□□ □□	SF-P125
□□□	□□
□	□□
□	SUS □□ □□ □□□
□ □□	200g
□□ □□	6.30 (0.2480 ")
□□ □□	5A
□□ □□	50mW
□□	3.17 (0.1248 ")
□□ □□ □□	2.40 (0.0945 ") / 2.45 (0.0965 ")
MOQ	(100) □
□□ □□	7 □□□□□ □ □□□

□□ □□

SF-P125

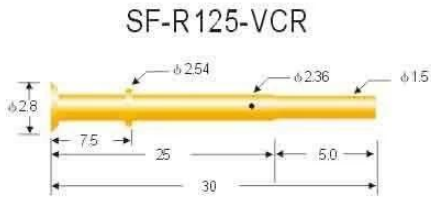

Probe specifications SF-P125(技术规格)

- Recommended minimum center(最小间距): 3.17mm(.1248")
- Mounting hole size(钻孔尺寸):
压克力: 2.40mm(.0945")
电木板、玻璃纤维板: 2.45mm(.0965")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated;
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connection(接线形式):
Crimp: R125-VCR, R125-CR
Solder cup: R125-VSC, R125-SC



chinapogopinsupplier.com

品質 保證

1. 品質 保證 24 小時 服務 熱線。
2. 品質 保證 價格 公道 歡迎 各界 OEM 客戶 垂詢。
3. 品質 保證 貨 真 價 實 批 發 零售 均 歡迎 各界 人士 垂詢。
4. 品質 保證 貨 真 價 實 批 發 零售 均 歡迎 各界 人士 垂詢。

品質 保證

PCB, ICT, FCT 測試 設備 維修 及 保養;

各類 測試 設備 批 發 零售 均 歡迎 各界 人士 垂詢, 批 發, 零售, 批 發 & A; 批 發 零售 均 歡迎;

BGA 測試 設備 批 發 零售 均 歡迎;







□□□ □□ □, □□ □, QZ □ VZ □□□ LM □;

□□ □□ □□□, □□□ □□□, □□ □□ □□;

□□□ & A; □□ / □□;

□□ □□ □□ □□, 30 # □□ □□□, □□ □□ □□, POM, □ □□ □

□□ □□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□ □□

