


□□ □□

□□	SFENG
□□ □□	SF-P50
□□□	□□
□	□□
□	SUS □□ □□ □□□
□ □□	100g
□□ □□	2.5 (0.0984 ")
□□ □□	1.5A
□□ □□	50mW
□□	1.27 (0.0500"0
□□ □□ □□	0.90 (0.0354 ") / 0.95 (0.0374 ")
MOQ	(100) □
□□ □□	7 □□□□□ □ □□□


□□ □□

# SF-P50

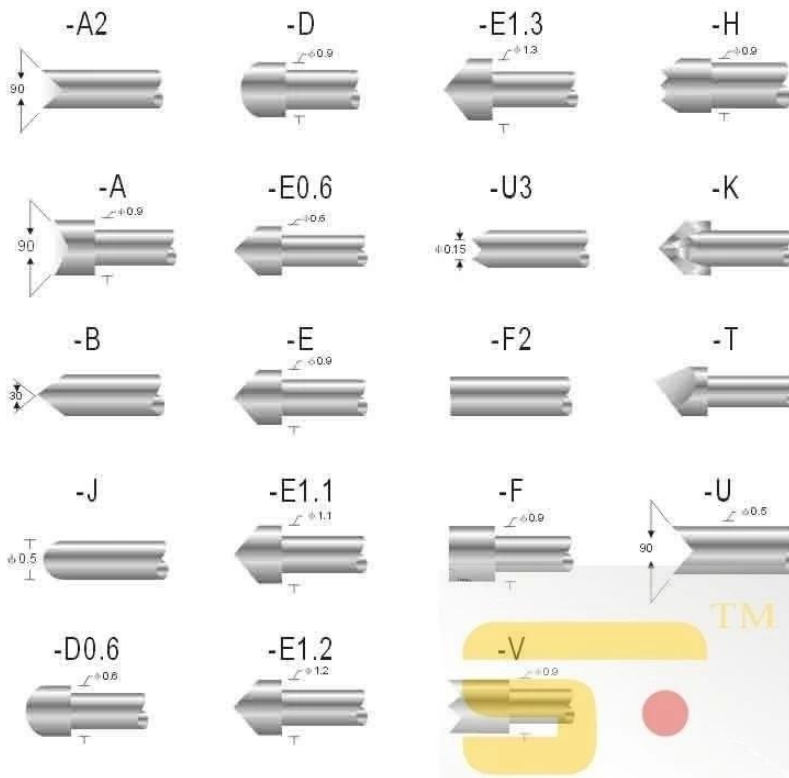

## Probe specifications SF-P50(技术规格)

- Recommended minimum center(最小间距):  
1.27mm(.0500 ")
- Mounting hole size(钻孔尺寸):  
V: 0.90mm(.0354 ")  
W: 0.95mm(.0374 ")
- Full travel(行程): 2.5(.0984 ")
- Spring force(弹簧压力): 100g
- Materials and finishes(材料及涂饰):  
Plunger: Be Cu, Rh plated; SK4, Rh plated  
Barrel: Phosphor bronze, Gold plated  
Spring: Stainless steel
- Current ration(额定电流): 1.5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

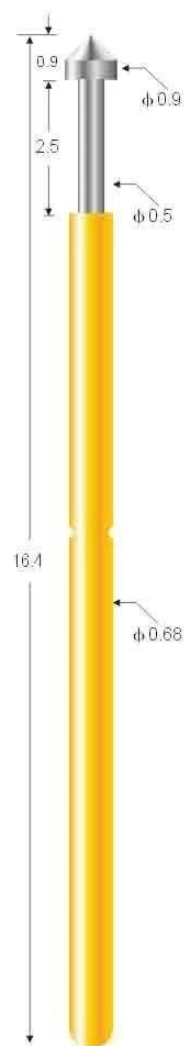

SF-P50-E



[chinapogopinsupplier.com](http://chinapogopinsupplier.com)

## 品質 保證

1. 品質 保證 24 小時 服務 熱線。
2. 品質 保證 價格 公道 歡迎 各界 OEM 客戶 垂詢。
3. 品質 保證 貨 真 價 實 批 發 零售 均 歡迎 各界 人士 垂詢。
4. 品質 保證 貨 真 價 實 批 發 零售 均 歡迎 各界 人士 垂詢。

## 品質 保證

PCB, ICT, FCT 測試 設備 維修 及 保養;

品質 保證 批 發 零售 均 歡迎 各界 人士 垂詢, 批 發, 零售, 批 發 & A; 批 發 零售 均 歡迎;

BGA □ □□□ □□□□□□ □□ □□ □□□;







□□□ □□ □, □□ □, QZ □ VZ □□□ LM □;

□□ □□ □□□, □□□□ □□□, □□ □□ □□;

□□□ & A; □□ / □□;

□□ □□ □□ □□, 30 # □□ □□□, □□ □□ □□, POM, □ □□ □

□□ □□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□ □□

