

- 銅板 銅 銅 銅 SF-P030 銅板

ICT 銅板 銅 銅 銅 銅板 銅 (銅 銅 銅板 銅板 銅) 銅板 銅板. 銅板 銅 銅板, 銅 銅 銅板 銅板 銅板. 銅板 銅 銅 銅 銅板 銅板 銅板.

ICT 銅板 銅 銅 PCB 銅 銅 銅板 銅板 銅板 銅板 銅板 銅板 銅板 銅板 銅板 銅板 銅板. 銅板, 銅板, 銅 銅板 銅 銅 銅板 銅板 銅板, 銅板, 銅 銅板, 銅 銅 銅 銅 銅 銅板 銅板 銅板 銅板 銅 銅 銅板.

銅 銅

SuzhouShengyifurui 銅 銅 Co., 銅 銅板 銅板 銅板 pinsupplier 銅板. 銅板 1984 銅 銅 銅 Cixi 銅 銅 銅 銅板 銅板. 銅 銅板 30 銅板 銅板 銅 銅板 15 銅 銅板 銅 銅板. 銅板 ISO 9001 銅 銅 銅板 銅 銅板.

銅板 Suzhouin 2010 銅板 銅 銅板 銅板 銅板. 銅 銅板 銅板 銅板 銅板 銅板 銅板 銅板 銅板 銅板 銅板. 銅板 銅板 銅, 銅 銅, 銅板 銅, 銅 銅 銅板 銅板 銅板. 銅板 PCB, ICT, SMT, IC 銅板 銅 銅板. 銅板 銅 銅 銅板 銅板 銅板 銅板 銅板 銅板.




Production Flow (生产流程)


The Chinese The World's

		
1. raw material warehouse	2. Lathe workshop	3. Assemble workshop
		
4. Quality inspection	5. Finished products	6. Packing


銅板 銅 銅 SF-P030 銅板




SF-R030-VR



SF-R030-VRW



SF-RL030-VR

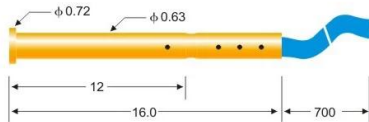

SF-RL030-VRW



-B




-U3



-J




-U




-E




-G2



-T



SF-P030-B



SF-PL030-B

Probe specifications SF-P030 PL030(技术规格)

- Recommended minimum center(最小间距): 0.90m(.0354 ")
- Mounting hole size(钻孔尺寸): 0.65mm(.0256 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 60g(克)
- Materials and finishes(材料及涂饰):
Plunger:SK4,Rh plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
- Current rating(额定电流): 1A(安培)
- Contact resistance(接触电阻): 150mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze,
Gold plated


Noted: Specifications subject to change without notice(注: 规格变动不另行通知)

2. 00 0 000

3. 00 000 00 0 00

4. 000 000 0000 0

Measuring Equipment >



Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test