

00 00

00	SFENG
00 00	SF-P030
000	00 00 Becu, 0 00 00 00
0	00, 0 00 00 00
0	SK4 00 000
0 00	60g
00 00	2.0MM
00 00	1A
00 00	150mΩ 0
00	1.0mm 0
00 00 00	0.75
MOQ	(100) 0
00 00	7 00000 0 000

00 00

胜峰探针
SFENG
The China's The World's

RoHS

QUALITY ASSURED FIRM
ISO 9001
SGS

CE


chinapogopinsupplier.com

Probe specifications SF-P030 PL030(技术规格)

- Recommended minimum center(最小间距): 0.90mm(.0354 ")
- Mounting hole size(钻孔尺寸): 0.65mm(.0256 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 60g(克)
- Materials and finishes(材料及涂饰):
Plunger:SK4,Rh plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 150mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze,
Gold plated

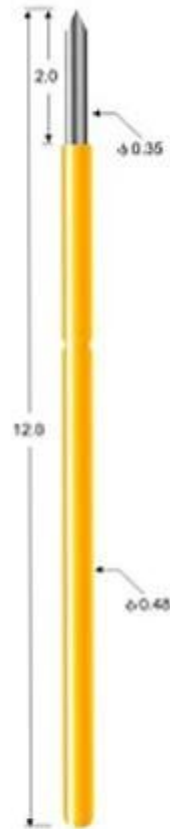

SF-P030-B

□□□ □□□







- 1.Reply 24 □□ □□ withn □□
- 2.Customized □□□□ □□□□, OEM □□
- 3.Delivery □□□ □□□□ □ □□ □□□□ □□□ □
- 4.provide □□□ □□□□ □□ □□ □□ □□

□□ □□

- □□□ □ □ PCB, ICT, FCT □□□□□□ (□□)
- □□ □ (□□□) □□□ (usuallytemporary) □□□ □□□□□
- , □□ □□□, □□□ & A □□□□□ □□ □□ □□;
- interconnectApplications;

- 探针或BGA & A, 半导体;
- 涂覆, LM 与 QZ & A; VZ系列;
- 探针, 探针, 探针 ...
- 探针 & A, 探针 / 探针;
- 探针 探针 探针, 30 # OKwire, 探针 探针, POM, 铁钩

探针 探针

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

探针 探针

