

Hoogfrequente sonde SF-2.87 BY 56.0-H


Specificaties

Merk	SFENG
Model	SF-PA1.65X32.3-LM2.0
Plunjer	Messing
Lichaam	Messing
De lente	SWP
Lente kracht	300 g \pm 20%
Werken reizen	3.0mm
Verguld	Verguld
Contactweerstand	\leq 100m Ω
Certificatie	ISO
MOQ	1000
Doorlooptijd	7-15 dagen na bevestiging van bestelling

Afbeelding van aangepaste sondepen



Aangepaste sondepen tekening

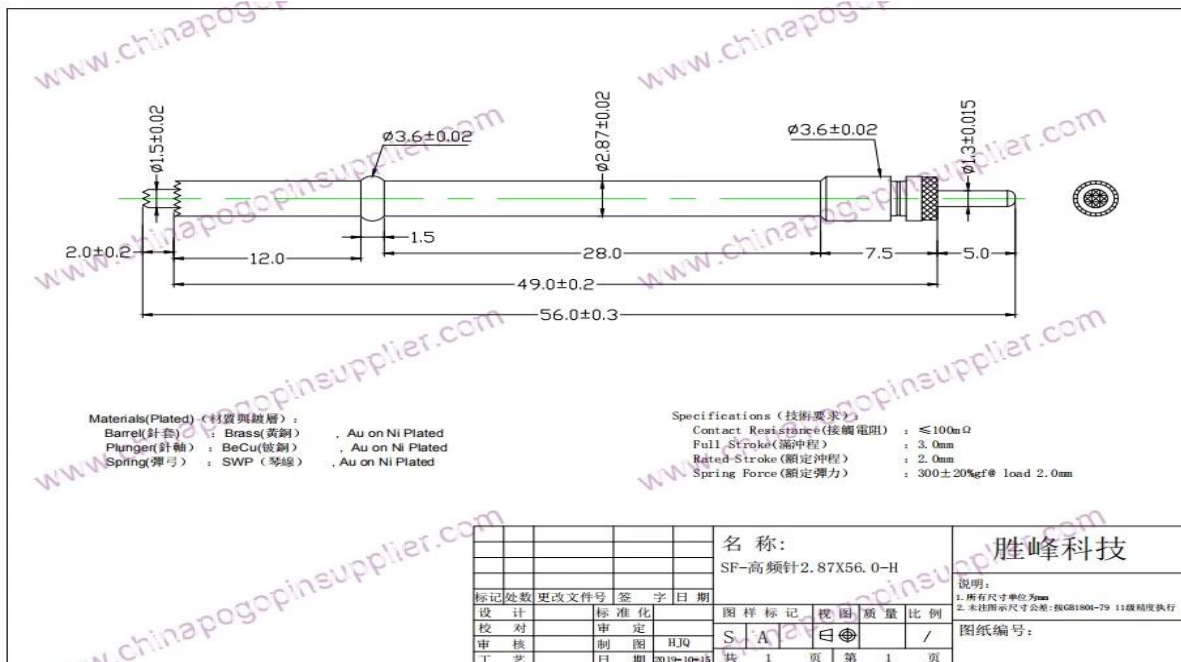

onze service

1. Snelle reactie.
2. Aangepast wordt geaccepteerd.
3. Korte productietijd en snelle levering.
4. Hoge kwaliteit en goede prijs.

Hoofd producten

Veerbelaste pen (enkel) van PCB-, ICT-, FCT-testen;

Veerpen (connector) om een verbinding tot stand te brengen tussen twee printplaten voor opladen, positionering, batterijen, halfgeleiders en versterkers; applicaties onderling verbinden;

BGA en halfgeleidertest dubbelzijdige sonde;

Universele pen zonder veer, verfnaald, LM-pen QZ en VZ-serie;

Hoge stroom sonde, de sonde schakelaars, naald condensatoren;

Pier en versterker; stopcontact / stopcontact;

Andere gerelateerde elektronische componenten, 30 # OK-lijn, jig lock, POM, ijzeren scharnieren, etc.

Productieproces



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products




6. Packing


Uitrusting testen



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope

Verpakking en levering

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

