


PCB-test veerbelaste contactsonde

Productinformatie

Merk	SFENG
Item nummer	PCB-test veerbelaste contactsonde
Serie	SF-PA75, SF-PA11 en SF-PA111
Plunjer	Be Cu, goud / vernikkeld
Lichaam	Messing, verguld
De lente	roestvrij staal
Lente kracht	120 g, 150 g, en 120 g
Cdringend verhoudingn	3A



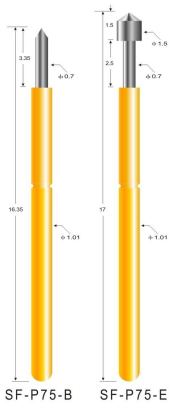


- Recommended minimum thread pitch(最小间距):
1.90mm(.0748")
- Mounting hole size(钻孔尺寸):
 压克力: 1.35mm(.0532")
电木板、玻璃纤维板: 1.40mm(.0551")
- Full travel (行程): 3.35(.1319")(.250(.0984"))
- Spring force(弹簧压力): 120g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated; SK4, Rh plated
Barrel: Phosphor bronze, Gold plated
Spring: Stainless steel
- Current rating(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

-11-


Noted: Specifications subject to change without notice! 注：规格变动不另行通知

SF-R75

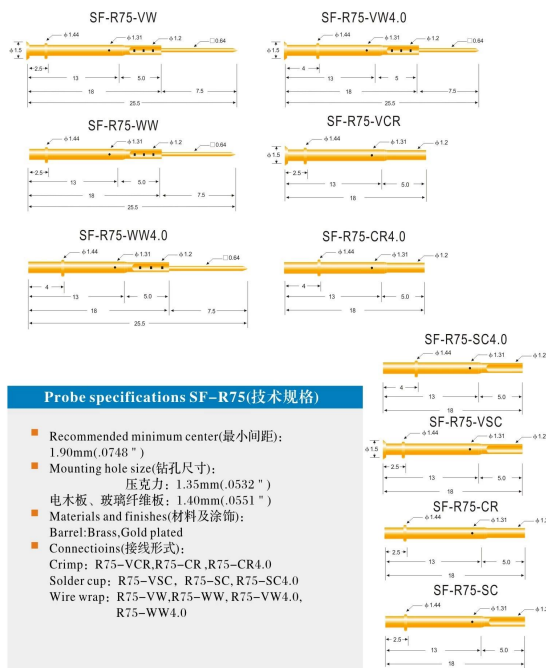

- Recommended minimum center(最小间距):
1.90mm(.0748")
- Mounting hole size(钻孔尺寸):
压孔力: 1.35mm(.0532")
- 电木板、玻璃纤维板: 1.40mm(.0551")
- Materials and finishes(材料及涂饰):
Barrel: Brass, Gold plated
- Connections(接线形式):
Crimp: R75-VCR, R75-CR, R75-CR4.0
Solder: R75-VSC, R75-SC, R75-SC4.0
Wire wrap: R75-VW, R75-WW, R75-VW4.0,
R75-WW4.0


Noted: Specifications subject to change without notice!注：规格变动不另行通知

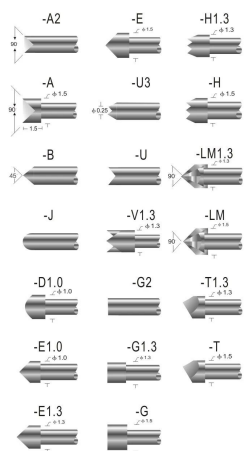

- Recommended minimum center(最小间距): 1.90mm(.0748")
- Mounting hole size(钻孔尺寸): 压克力: 1.35mm(.0532")
电木板、玻璃纤维板: 1.40mm(.0551")
- Full travel(行程): 4.0(.1575")
- Spring force(弹簧压力): 150g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current rating(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

-15-

Noted: Specifications subject to change without notice!注：规格变动不另行通知

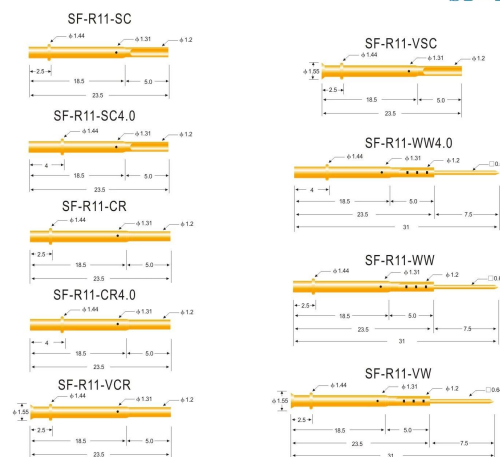
SF-R11 

- Recommended minimum center(最小间距):
1.90mm(.0748")
- Mounting hole size(钻孔尺寸):
 压克力: 1.35mm(.0532")
电木板、玻璃纤维板: 1.40mm(.0551")
- Materials and finishes(材料及涂饰):
Barrel: Brass, Gold plated
- Connection(接线形式):
Crimp: R11-VCR, R11-CR, R11-CR4.0
Solder cup: R11-VSC, R11-SC, R11-SC4.0
Wire wrap: R11-VW, R11-WW, R11-WW4.0


Noted: Specifications subject to change without notice/注：规格变动不另行通知

-16-

SF-P111



SF-P111-E

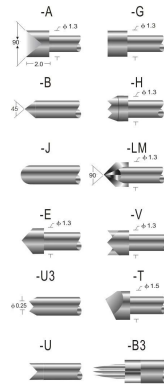


Probe specifications SF-P111(技术规格)


- Recommended minimum center(最小间距): 1.90mm(.0748")
- Mounting hole size(钻孔尺寸): 压克力: 1.35mm(.0532")
电木板、玻璃纤维板: 1.40mm(.0551")
- Full travel(行程): 6.3(.2481")
- Spring force(弹簧压力): 120g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current rating(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

Noted: Specifications subject to change without notice(注: 规格变动不另行通知)


SF-R111




SF-R111-VCR2.5




SF-R111-CR




SF-R111-VW(T)




SF-R111-WW




SF-R111-WW2.5



SF-R111-VSC2.5



SF-R111-SC



SF-R111-VW2.5

Probe specifications SF-R111(技术规格)

- Recommended minimum center(最小间距): 1.90mm(.0748")
- Mounting hole size(钻孔尺寸): 压克力: 1.35mm(.0532")
电木板、玻璃纤维板: 1.40mm(.0551")
- Materials and finishes(材料及涂饰):
Barrel: Brass, Gold plated
- Connections(接线形式):
Crimp: R111-VCR2.5, R111-CR
Solder cup: R111-VSC2.5, R111-SC
Wire wrap: R111-VW2.5, R111-WW2.5, R111-WW
Terminal: R111-VW(T)

Noted: Specifications subject to change without notice(注: 规格变动不另行通知)

Productie Stroom



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products




6. Packing

Test Uitrusting



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope

Verpakking en verzending

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

