

## Stapsonde SF-L106-A1.8

### Materiaal en afwerkingen

Plunger: brons of messing of BeCu, verguld of vernikkeld;

Vat: messing, verguld of vernikkeld;


Veer: roestvrij staal of muziekdraad;

### Afbeeldingen


- Eventuele tips kunnen wij voor u verzorgen
- Als u hierin geïnteresseerd bent, neem dan contact met mij op



L106-F1.3

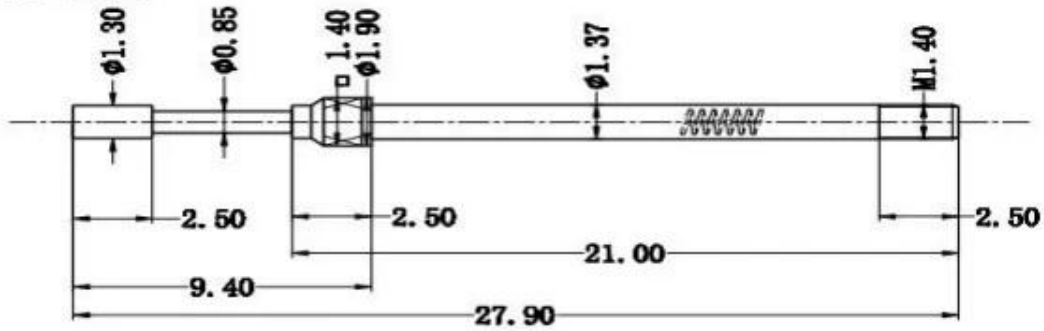

L106-套管

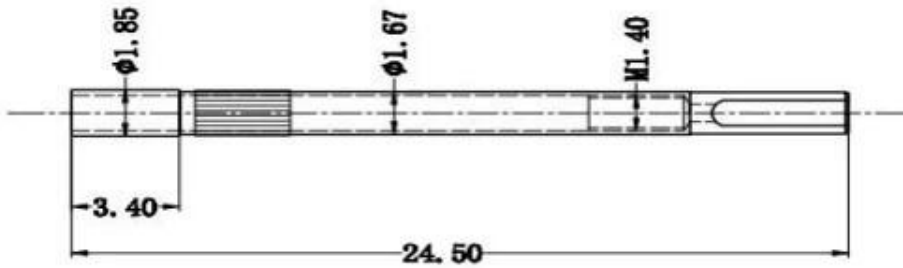

## Onze voordelen

1. we hebben 30 jaar ervaring in sonde pin en hebben onszelf fabriek.
2. we bieden gratis monster en hebben een testafdeling.
3. we kunnen producten vervaardigen als uw verzoek.
4. wij garanderen de beste prijs en goede service.


## Ons hoofdproduct

Spring loaded pin (single) for PCB, ICT, FCT testing etc;  
Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;  
Double ended probe for BGA and Semiconductor testing;  
Universal pin without spring, coating pin, LM pin with QZ and VZ series;  
High current probe, Switch probe, Capacitance needle;  
Terminal & receptacle /socket;  
Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

## Controle van testapparatuur



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope

## Verpakking en verzending

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

