100mil ICT test probe SF-PA1.65 BY 32.3-LM2.0


Specifications

| Brand | SFENG |
|--------------------|----------------------------------|
| Model | SF-PA1.65X32.3-LM2.0 |
| Plunger | BeCu |
| Body | Brass |
| Spring | SWP |
| Spring force | 350g±50g |
| Working travel | 4.0mm |
| Plated | Gold plated |
| Contact Resistance | 50mΩ |
| Current Ration | 5A |
| Full Stroke | 5.30mm |
| MOQ | 1000 |
| Lead Time | 7-15 Days after confirming order |

Customized probe pin Image



Customized probe pin drawing

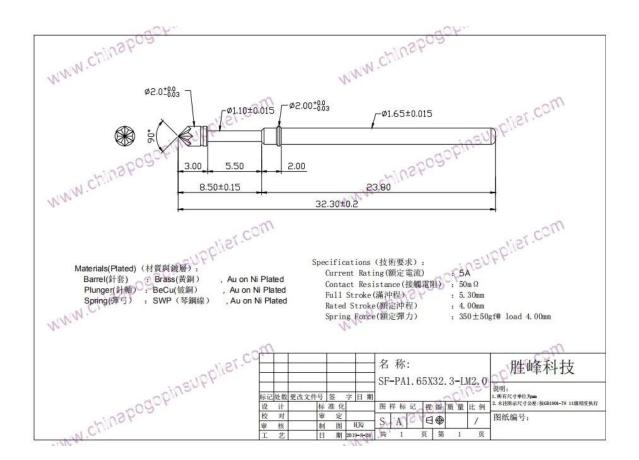

our service

- 1. Quick response.
- 2. Customized is accepted.
- 3. Short production time and fast delivery.
- 4. High quality and good price.

Main products

Spring-loaded pin (single) of PCB, ICT, FCT testing;

Spring pin (connector) to establish a connection between two printed circuit boards for charging, positioning, batteries, semiconductors and amplifiers; interconnect applications;

BGA and semiconductor test double-ended probe;

Universal pin no spring, paint needle, LM pin QZ and VZ series;

High current probe, the probe switches, capacitors needle;

Pier and amplifier; socket / socket;

Other related electronic components, 30 # OK line, jig lock, POM, iron hinges, etc.

Production process







3. Assemble workshop



- 4. Quality inspection
- 5. Finished products



6. Packing

Testing equipment



1. Agilent current testing



2. Quadratic element



3.Load Curve Meter



4.Bond Test



5.Life Fatigue Test



6.Microscope

Packing & delivery

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

