


## Product Specification

Brand	SFENG
Item number	SF-P020-B
Plunger	Brass or Becu,gold or Ni plated
Barrel	Brass,gold or Ni plated
Spring	SK4,music wire
Spring Force	80g
Full Travel	2.0mm
Current Ration	1A
Current Resistance	120mΩ
Pitch	1.0mm
Mounting hole size	0.75mm
MOQ	100 pcs
Lead time	7 working days after receiving the payment

## Product Picture

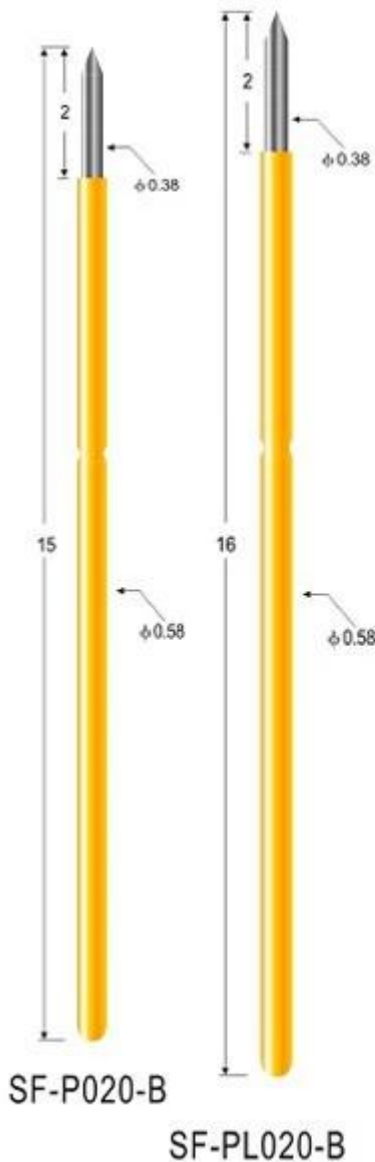

### Probe specifications SF-P020 PL020 (寸)

- Recommended minimum center(最小间距): 1.0mm(.0394 " )
- Mounting hole size(钻孔尺寸): 0.75mm(.0295 " )
- Full travel(行程): 2.0(.0787 " )
- Spring force(弹簧压力): 80g(克)
- Materials and finishes(材料及涂饰):  
Plunger:SK4,Rh plated  
Barrel:Phosphor bronze,Gold plated  
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 120mΩ(毫欧姆)

#### Receptacle specifications

Materials and finishes: Phosphor bronze,  
Gold plated

胜峰探针  
**SFENG**  
The China's The World's

RoHS

QUALITY ASSURED FIRM  
**ISO 9001**  
SGS

CE



chinapogopinsupplier.com

## ***Our Service***

- 1.Reply your inquiry withn 24 working hours
- 2.Customized design is available,OEM are welcomed
- 3.Delivery the probe pins to our clients all over the world with speed and precision
- 4.provide the lowest price with high quality to our client

## ***Main Products***

- Spring loaded pin(single) for PCB,ICT,FCT testing,etc;
- Pogo pin(connector) to establish a(usuallytemporary)connection between two printed circuit boards for charging, locating, Battery, Semiconductor &

interconnectApplications;

---Double ended probe orBGA&semiconudtion testing;







---Universal pin without spring,coatingpin,LM pin withQZ&VZseries;

---High current probe,Switch probe,Capacitance needle...

---Terminal&receptacle/socket;

---Other related electronic compents,30#OKwire,Jig locks,POM,Ironhinge,etc

## Quality Control

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

## Packing Picture

