


Production specifications

Item number	SF3653
Pitch	3.0mm
Temperature	ΔT≤20℃
Spring force	185g
Current	5Amp
Resistance	≤10mΩ
MOQ	100PCS
Payment	T/T
Delivery time	5-10days after receiving the payment

Product Pictures

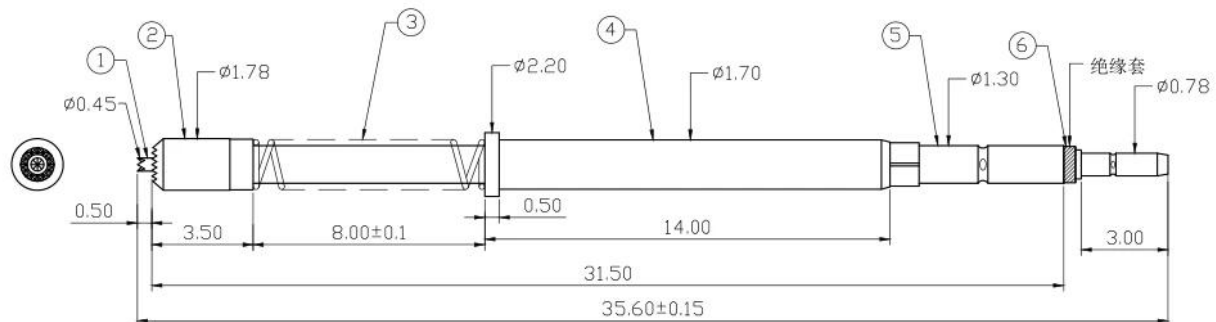

技术要求:

1. 探针 $\phi 1.78$ 针头为铍铜, 针头硬度HRC40 其余为磷铜, 采用对接方式;
探针 $\phi 0.45$ 探针为铍铜, 针头硬度HRC40;
2. 单根 $\phi 1.78$ 探针接触电阻 $<50\Omega$ 额定电流5A;
单根 $\phi 0.45$ 探针接触电阻 $<80\Omega$;
3. 探针头部为尖齿结构, 采用钝化处理;
4. 探针头部平面度小于 0.05mm

6	绝缘套	PEEK
5	外套管	黄铜管
4	外针套	黄 铜
3	弹 簧	不锈钢线
2	外针头	铍 铜
1	内心针	铍 铜
序 号	名 称	材 料

Production Flow



1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products



6. Packing

Testing Equipment

Measuring Equipment ➤



Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test

Packing



Main products

- 1.Spring loaded pin(single)for PCB,ICT,FCTtesting etc;
- 2.Pogo pin(connector)to establish connection between two printed circuit boards for charging,locating,battery,semiconductor&interconnector applications;
- 3.Double ended probes for BGA and semiconductor testing;
- 4.Universal pin without spring,coating pin,LM pin with QZ and VZ series;
- 5.High current probe,switch probe,capacitance needle;
- 6.Terminal&receptacle/socket;
- 7.Other related electronic components,Jig locks,POM and etc.

Whatever you want,please contact us without hesitation ,and we will try our best to meet your requirement within our capability.

Our service

- 1.We can reply your inquiry within 24 working hours;
- 2.Customized design is available and OEM are welcomed;
- 3.We can deliver the probe pins to our clients all over the world with speed and precision.
- 4.We can provide the lowest price with high quality products to our clients.

