


## Product Specification

Model	SF265-G300-5780L-1300L-250G-002
Material	Plunger: Becu, Au on Ni plated Barrel: Brass, Au on Ni plated Insulation sleeve: PEEK Solder Connection: Becu, Au on Ni plated Tip: POM Spring: SWP
Current Rating	3A
Spring force	2.5N
Full Stroke	7.0mm
Switching Path	2.4mm

## Product drawing

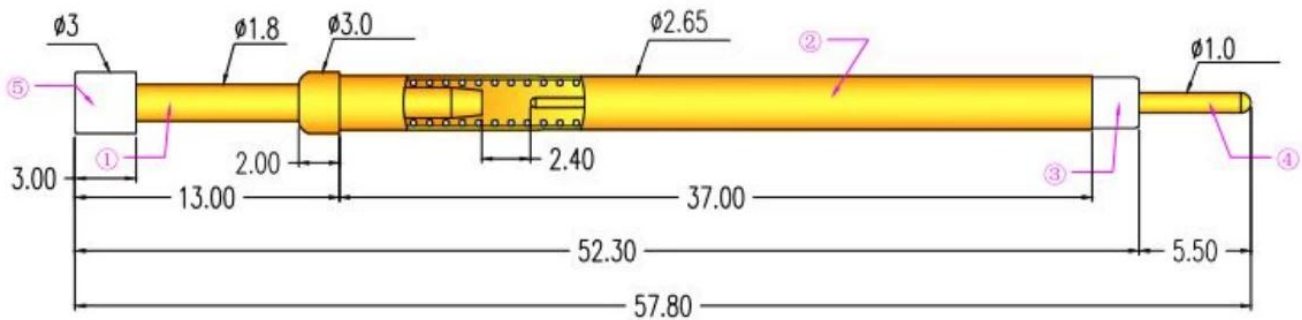

## Our Service

1. We can reply your inquiry within 24 working hours.
2. Customized design is available and OEM are welcomed.
3. We can deliver the probe pins to our clients all over the world with speed and precision.
4. We can provide the lowest price with high quality product to our client .

## Main Products

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;







Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

## Quality Control

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

## Packing



Item: SF265-G300-G5780L-  
1300L-250G-002

Qty: 100PCS

Date: 2022/11/26