


## Technical Specifications

Cards	SFENG
Model	SF-P75
Needle bar	Brass or beryllium copper, gold or nickel-plated
Needle	Brass, gold or nickel plated
Spring	SK4, music line
Elasticity	120 g
All tourism	3.35 mm
Electric current	3A
Resistance	Is 50mΩ.
Minimum spacing	1.9 mm
Mounting Hole Size	1.35 mm
MOQ	100
delivery time	7 working days after receipt of payment

## Product Image

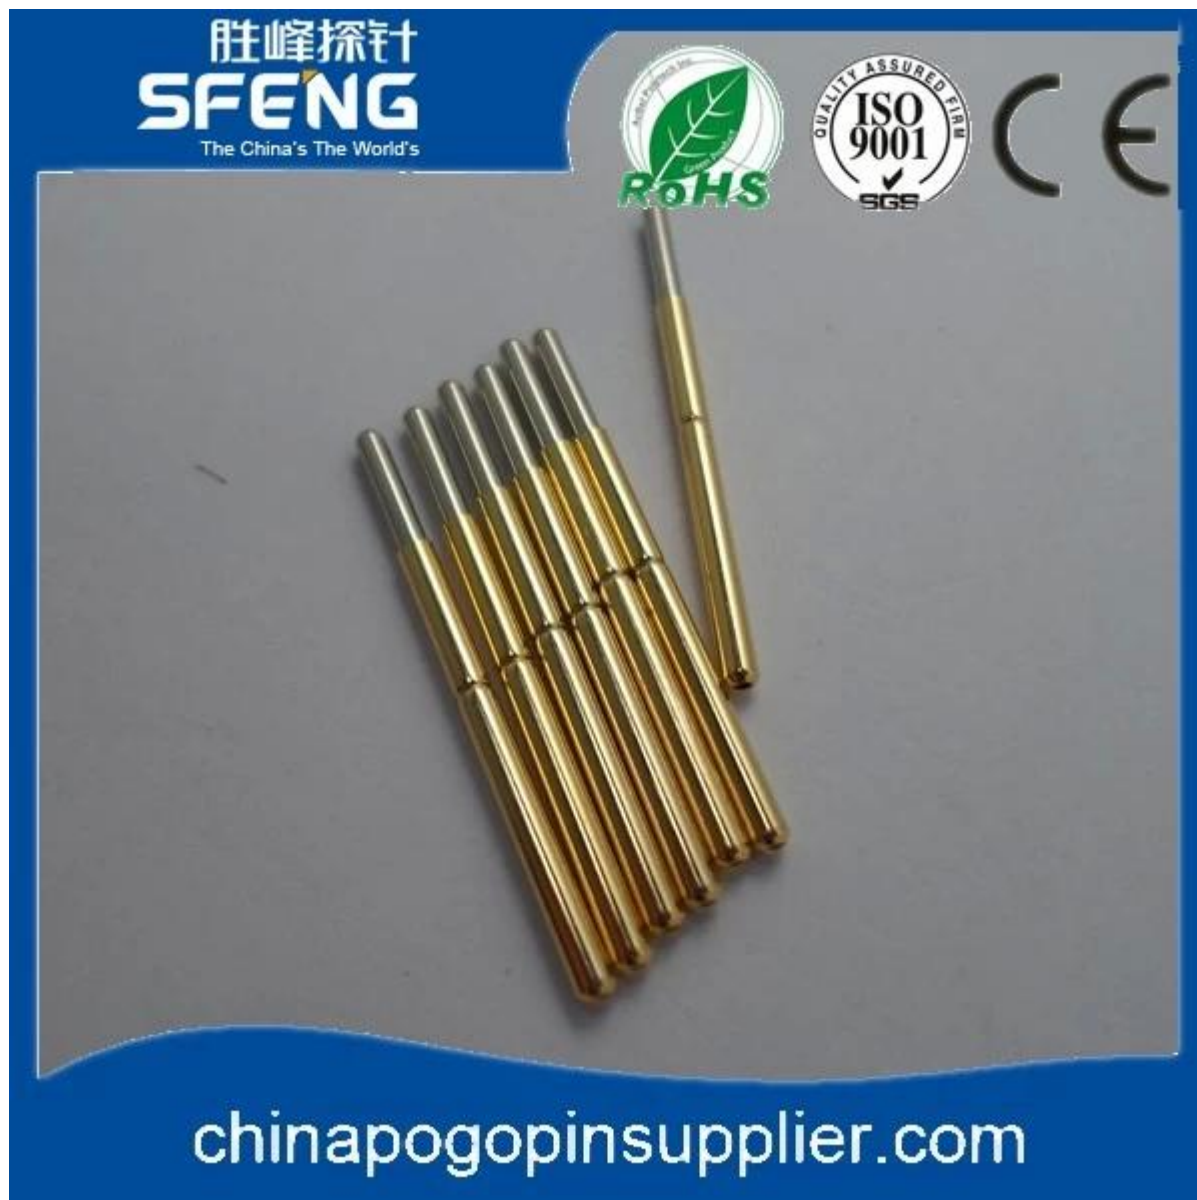

胜峰探针  
**SFENG**  
The China's The World's



[chinapogopinsupplier.com](http://chinapogopinsupplier.com)

### ***our service***







1. to respond to your inquiry within 24 working hours
2. You can customize the product, welcome OEM
- To customers around the country 3. fastest delivery probe
- 4, the lowest price, the best quality to customers

### ***main products***

- For the PCB, ICT, FCT testing
- Ejector pin charging printed circuit boards, positioning the semiconductor
- For BGA and amplifier; amp; needle semiconductor test;

- No spring straight needle, insulated needle, LM needle;
- High current needle, switch needle, needle fusion ...
- Terminal; socket / socket;
- O and other related electronic parts, 30 # OKwire, rack deduction, POM.

**Quality control**

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

**Packing pictures**

