


## Product Specification

Model	SF-0.86*18.5-BB
Material	-Barrel: Ph, Au on Ni plated -Plunger: Becu, Au on Ni plated -Spring: SWP
Current Rating	1.5A
Contact Resistance	80mΩ
Full Stroke	4.0mm
Rated Stroke	2.8mm
Spring force	25±5gf@ load 2.8mm

## Product Drawing

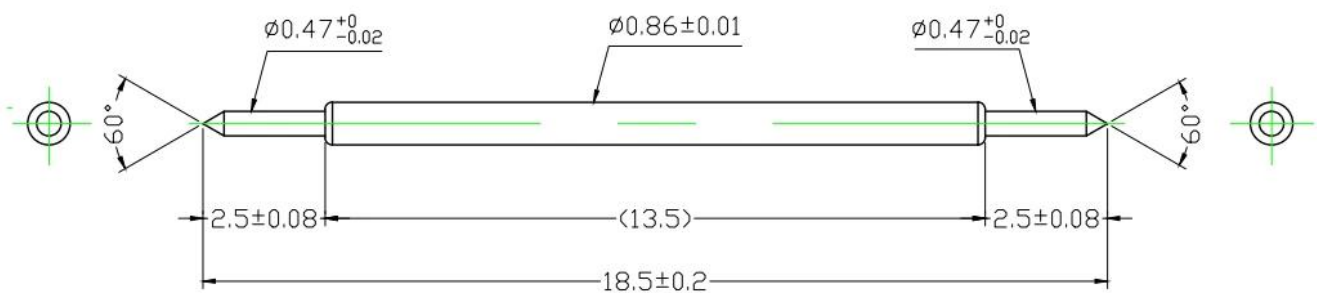

## Our Service

1. We can reply your inquiry within 24 working hours.
2. Customized design is available and OEM are welcomed.
3. We can deliver the probe pins to our clients all over the world with speed and precision.
4. We can provide the lowest price with high quality product to our client .

## Main Products

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locati ng, Battery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;

Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

## Production Equipment

### SOURCE MANUFACTURERS / QUALITY ASSURANCE



## Packing Picture



## Factory Image

