
## **Product Specification**

Brand	SFENG
Item number	SF-P100-J
Plunger	brass
Barrel	brass
Spring	SUS or Music wire
Spring Force	200g
Full Travel	6.40(0.2520'')
Current Ration	ЗА
Current Resistance	50mW
Pitch	2.54(0.1000'')
Mounting hole size	1.70(0.0670'')/1.75(0.0689'')
MOQ	100 pcs
Lead time	7 working days after receiving the payment

## **Product Picture**

# SF-P100

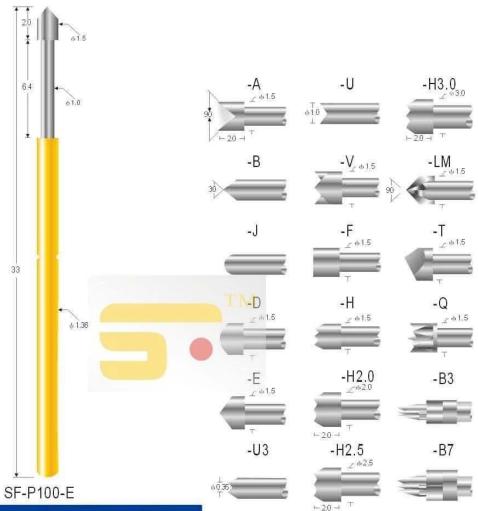

#### Probe specifications SF-P100(技术规格)

- Recommended minimum center(最小问距): 2.54mm(.1000 ")
- Mounting hole size(钻孔尺寸):

压克力: 1.70mm(.0670 ")

电木板、玻璃纤维板: 1.75mm(.0689 ")

- Full travel(行程): 6.40(.2520 ")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):
   Plunger:Be Cu,Rh plated; SK4,Rh plated
   Barrel:Brass,Gold plated
   Spring:Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

www.shengfengdz.com



#### **Our Service**

- 1. We can reply your inquiry within 24 working hours.
- 2. Customized design is available and OEM are welcomed.
- 3. We can deliver the probe pins to our clients all over the world with speed and precision.
- 4. We can provide the lowest price with high quality product to our client

#### **Main Products**

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Batt ery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;


Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

## **Quality Control**

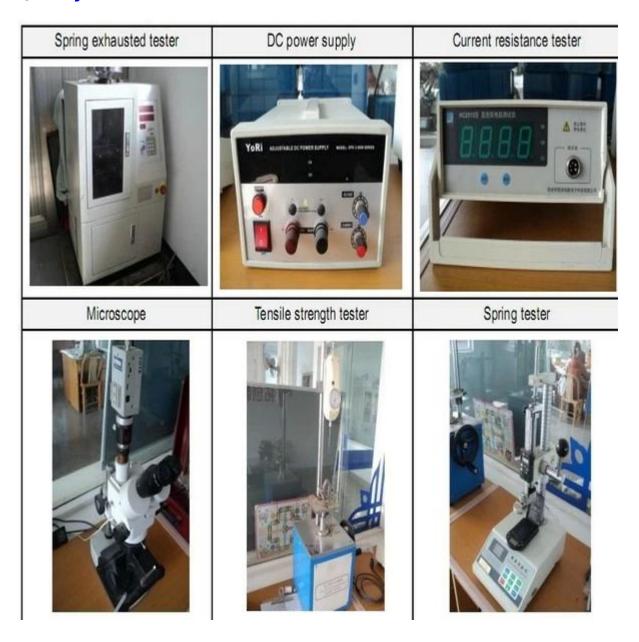

**Packing Picture** 

