


## Product Specification


|                      |  |
|----------------------|--|
| Brand                | SFENG                                      |
| Item number          | 0.8-2.0*95.25mm                            |
| Material and Plating | Brass, Gold-plated,SWP;                    |
| Lead time            | 7 working days after receiving the payment |

## Product Picture

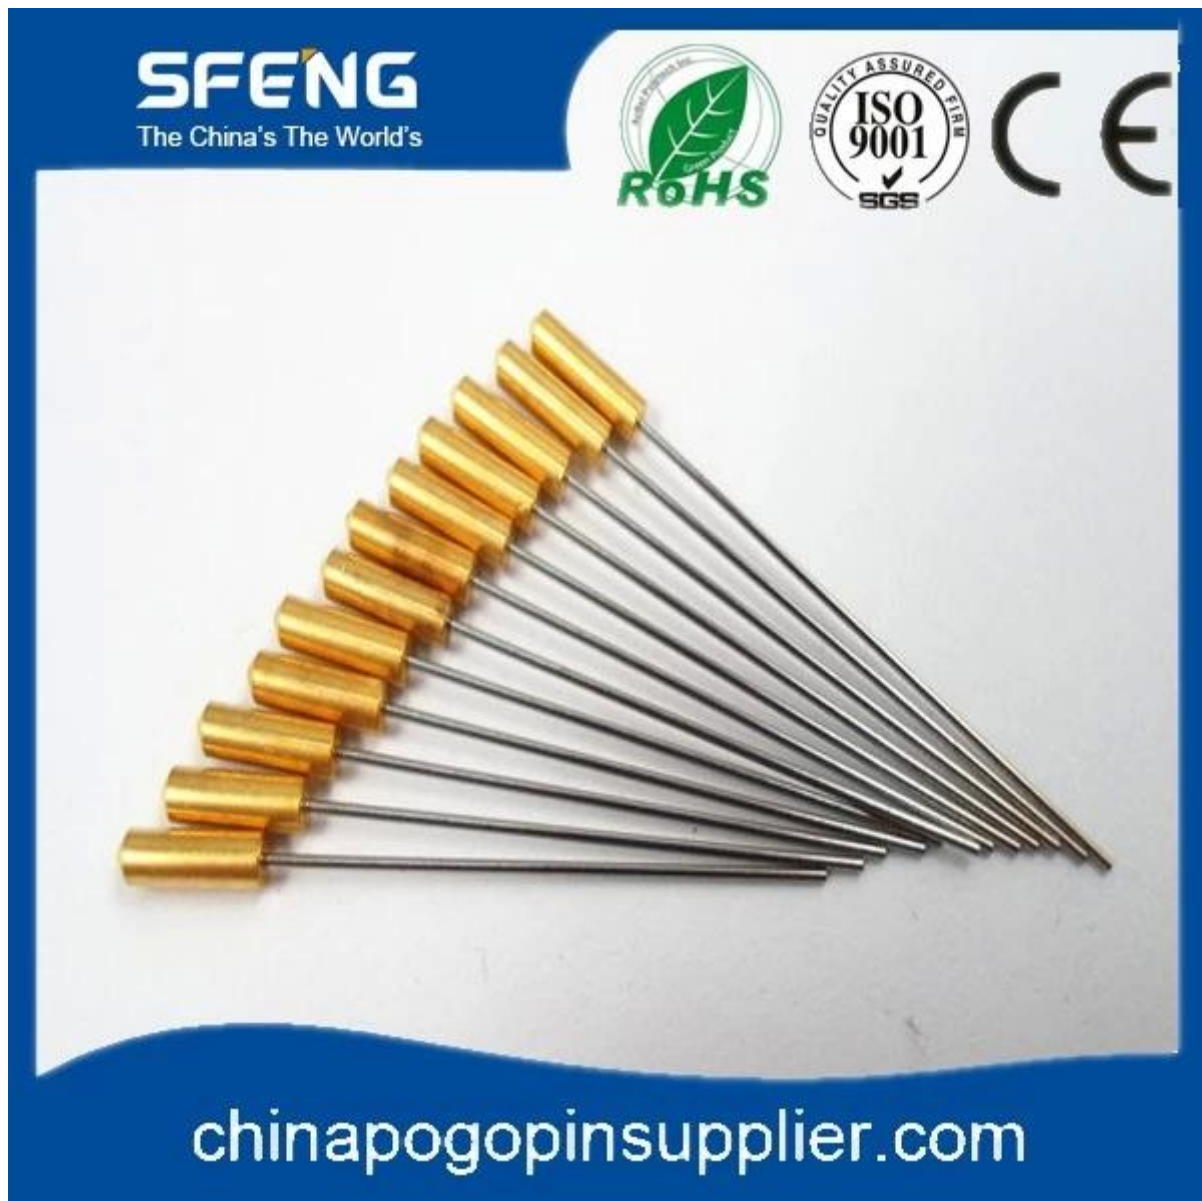

## SF-大头针系列

### SF-大头针

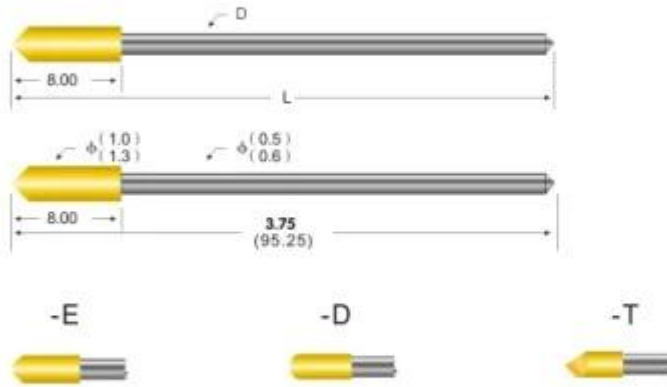

| 型号 Type(D)         | 长度 Linear(L)            | 可选针头类型<br>Available Tip Style |
|--------------------|-------------------------|-------------------------------|
| SF- $\phi$ 0.8-1.0 | 18、33、36、39、43.25、95.25 | SF-E-D-T                      |
| SF- $\phi$ 0.8-1.3 | 18、33、36、39、43.25、95.25 | SF-E-D-T                      |
| SF- $\phi$ 0.8-1.5 | 18、33、36、39、43.25、95.25 | SF-E-D-T                      |
| SF- $\phi$ 0.8-1.8 | 18、33、36、39、43.25、95.25 | SF-E-D-T                      |
| SF- $\phi$ 0.8-2.0 | 18、33、36、39、43.25、95.25 | SF-E-D-T                      |
| SF- $\phi$ 0.8-2.5 | 18、33、36、39、43.25、95.25 | SF-E-D-T                      |
| SF- $\phi$ 0.8-3.0 | 18、33、36、39、43.25、95.25 | SF-E-D-T                      |
| SF- $\phi$ 0.8-3.5 | 18、33、36、39、43.25、95.25 | SF-E-D-T                      |
| SF- $\phi$ 0.8-4.0 | 18、33、36、39、43.25、95.25 | SF-E-D-T                      |
| SF- $\phi$ 0.8-6.0 | 18、33、36、39、43.25、95.25 | SF-E-D-T                      |

#### Probe specifications SF-大头针(技术规格)

- Recommended minimum center(最小间距): 1.3mm(.0512 ")
- Support Pressure(承受压力): 5kg
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50m $\Omega$ (毫欧姆)

## Our Service

1. We can reply your inquiry within 24 working hours.
2. Customized design is available and OEM are welcomed.
3. We can deliver the probe pins to our clients all over the world with speed and precision.
4. We can provide the lowest price with high quality product to our client .

## Main Products

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;







Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

## Quality Control

|   |   |  |
|---|---|--|
| Spring exhausted tester   | DC power supply   | Current resistance tester  |
|  |  |  |
| Microscope  | Tensile strength tester   | Spring tester  |
|  |  |  |

## Packing Picture

