

Product Picture

胜峰探针
SFENG
The China's The World's


RoHS

QUALITY ASSURED FIRM
ISO 9001
SGS

CE


chinapogopinsupplier.com

SF-P125

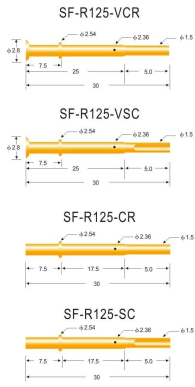


Probe specifications SF-P125(技术规格)

- Recommended minimum center(最小间距): 3.17mm(.1248")
- Mounting hole size(钻孔尺寸): 压克力: 2.40mm(.0945")
电木板、玻璃纤维板: 2.45mm(.0965")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):
Plunger: Be, Cu, Rh plated;
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式):
Crimp: R125-VCR, R125-CR
Solder cup: R125-VSC, R125-SC

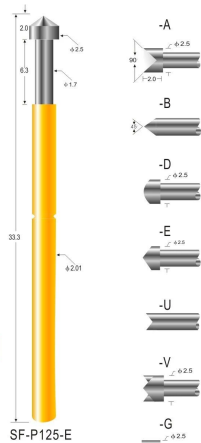


SF-P125-E

SF-P156

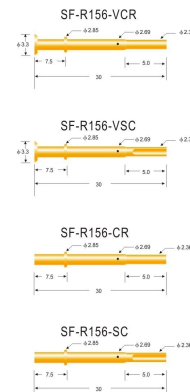

Probe specifications SF-P156(技术规格)

- Recommended minimum center(最小间距): 4.75mm(.1870")
- Mounting hole size(钻孔尺寸): 压克力: 2.75mm(.1083")
电木板、玻璃纤维板: 2.90mm(.1102")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 250g
- Materials and finishes(材料及涂饰):
Plunger: Be, Cu, Rh plated;
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式):
Crimp: R156-VCR, R156-CR
Solder cup: R156-VSC, R156-SC



SF-P156-E

-21-

Noted: Specifications subject to change without notice注: 规格变动不另行通知

-22-

Noted: Specifications subject to change without notice注: 规格变动不另行通知

Our Service

1. We can reply your inquiry within 24 working hours.
2. Customized design is available and OEM are welcomed.
3. We can deliver the probe pins to our clients all over the world with speed and precision.
4. We can provide the lowest price with high quality product to our client .

Main Products

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;

Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Quality Control



Packing Picture

