


Production specifications

Item number	SF3764
Size	dia4.0*42.0mm
Material	Plunger:Brass, Ni plated Barrel:Brass, Ni plated Spring:SUS
Full travel	10.0mm
Rated Stroke	6.5mm
Spring force	200±35gf@load 6.5mm
MOQ	100PCS
Payment	T/T
Delivery time	5-15days after receiving the payment

Product Pictures

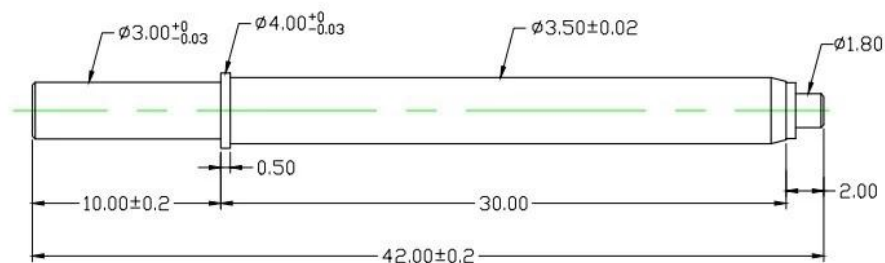

Materials(Plated) (材質與鍍層) :
 Barrel(針套) : Brass(黃銅) , Ni Plated
 Plunger(針軸) : Brass(黃銅) , Ni Plated
 Spring(彈弓) : SUS (不銹鋼線) , /

Specifications (技術要求) :
 Full Stroke(滿行程) : 10.0mm
 Rated Stroke(額定行程) : 6.50mm
 Spring Force(額定彈力) : 200±35gf@ load 6.50mm

					名称: SF-GP3. 5X42-G				胜峰探针	
									说明: 1. 所有尺寸单位为mm 2. 未注图示尺寸公差:按GB1804-79 11级精度执行	
设计	处数	更改文件号	签字	日期	图样标记	视图	质量	比例	图纸编号:	
校对			标准化		S	A	☉	1:1		
审核			制图	HJQ						
工艺			日期	2017-12-12	共	1	页	第	1	页

Production Flow



Production Flow (生产流程)

SFENG
The China's The World's



1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing

Testing Equipment



Packing



Main products

- 1.Spring loaded pin(single)for PCB,ICT,FCTtesting etc;
- 2.Pogo pin(connector)to establish connection between two printed circuit boards for charging,locating,battery,semiconductor&interconnector applications;
- 3.Double ended probes for BGA and semiconductor testing;
- 4.Universal pin without spring,coating pin,LM pin with QZ and VZ series;
- 5.High current probe,switch probe,capacitance needle;
- 6.Terminal&receptacle/socket;
- 7.Other related electronic components,Jig locks,POM and etc.

Whatever you want,please contact us without hesitation ,and we will try our best to meet your requirement within our capability.

Our service

- 1.We can reply your inquiry within 24 working hours;
- 2.Customized design is available and OEM are welcomed;
- 3.We can deliver the probe pins to our clients all over the world with speed and precision.
- 4.We can provide the lowest price with high quality products to our clients.