# **Specifications**

Brand	SFENG	
Model	SF-PH1	
Plunger	Phosphor Bronze	
Body	Brass	
Spring	SUS	
Spring force	/	
Working travel	/	
Plated	Gold plated	
Current Resistance	/	
Spacing	/	
Mounting dimensions	/	
MOQ	100	
delivery time	3 Days after confirming order	
Spacing Mounting dimensions MOQ		


# Customized probe pin Image





Customized probe pin drawing

### SF-PH1.2.3.4.5.6

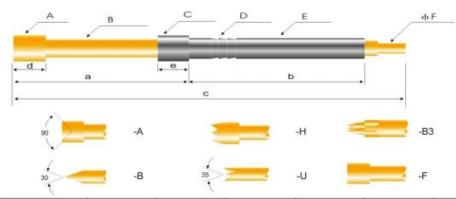

规格 Spec 型号 Type	SF-PH-1	SF-PH-2	SF-PH-3	SF-PH-4	SF-PH-5	SF-PH-6
A	1.20	1.50	2.00	2.50	3.50	5.00
В	0.75	0.95	1.29	1.80	2.50	3.50
C	1.20	1.50	2.00	2.50	3.50	5.00
D	0.98	1.34	1.83	2.33	3.23	4.55
Е	0.98	1.27	1.77	2.27	3.17	4.55
F	0.47	0.56	0.75	1.25	1.62	2.45
a	7.0	10.0	16.0	16.0	16.0	16.0
b	9.5	13.0	16.0	18.0	18.0	19.5
c	20.5	27.0	36.0	38.0	38.0	40.0
d	1.0	2.0	2.0	3.0	3.0	4.0
e	1.0	2.0	2.0	3.0	3.0	1.5

#### our service

- 1. Quick response.
- 2. Customized is accepted.
- 3. Short production time and fast delivery.
- 4. High quality and good price.

#### **Main products**

Spring-loaded pin (single) of PCB, ICT, FCT testing;

Spring pin (connector) to establish a connection between two printed circuit boards for charging, positioning, batteries, semiconductors and amplifiers; interconnect applications;

BGA and semiconductor test double-ended probe;

Universal pin no spring, paint needle, LM pin QZ and VZ series;

High current probe, the probe switches, capacitors needle;

Pier and amplifier; socket / socket;

Other related electronic components, 30 # OK line, jig lock, POM, iron hinges, etc.

#### **Production process**







1. Raw material warehouse 2. Lathe workshop

3. Assemble workshop







4. Quality inspection


5. Finished products

6. Packing


### Testing equipment



1. Agilent current testing



2. Quadratic element



3.Load Curve Meter



4.Bond Test



5.Life Fatigue Test



6.Microscope

### Packing & delivery

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.













