


Product Picture



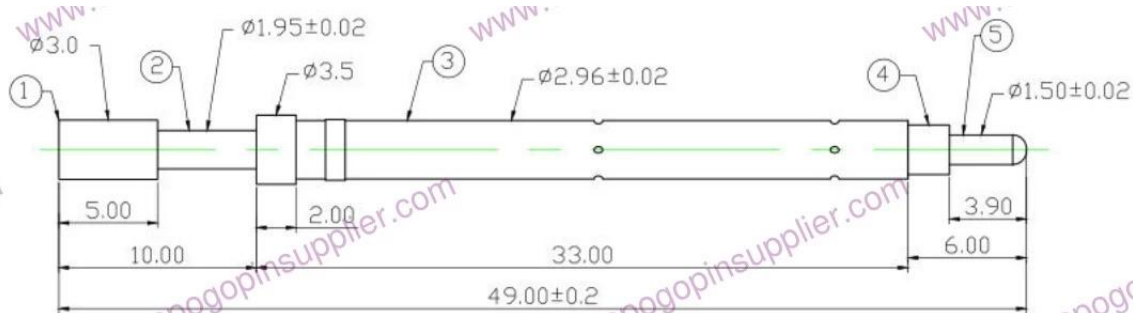

Material and Plating:(材质与电镀):

- ① Plastic tip(塑料头): White POM (白色POM);
- ② Plunger(针杆): Brass, Au plating (黄铜镀金);
- ③ Barrel(针套): Brass, Au plating (黄铜镀金);
- ④ Insulation sleeve(绝缘套): PEEK;
- ⑤ Tail pin(尾针): Phosphor bronze, Au plating (磷铜镀金);

Technical parameters: (技术要求):

- ① Working stroke: 1.5mm;
- ② Spring force: 100g±20g@1.5mm;

Our Service

1. We can reply your inquiry within 24 working hours.
2. Customized design is available and OEM are welcomed.
3. We can deliver the probe pins to our clients all over the world with speed and precision.
4. We can provide the lowest price with high quality product to our client .

Main Products

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;

Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Quality Control



Packing Picture

