


## Product Specification

Item Code	SF3028
Material	Plunger:C3604 Barrel: Brass, PEEK Spring: SUS304
Spring force	470g
Recommended Stroke	6.6mm
Current Ration	10A
Resistance	□10mΩ

## Product Drawing

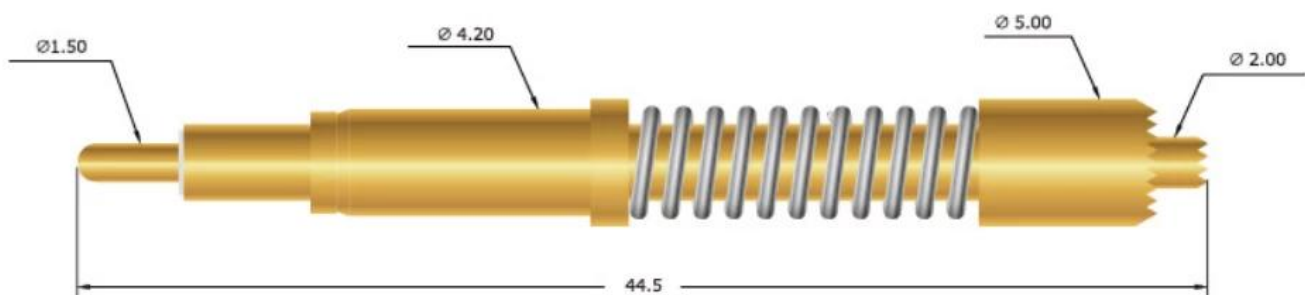

## Our Service

- 1.Reply your inquiry withn 24 working hours
- 2.Customized design is available,OEM are welcomed
- 3.Delivery the probe pins to our clients all over the world with speed and precision
- 4.provide the lowest price with high quality to our client

## Main Products







- Spring loaded pin(single) for PCB,ICT,FCT testing,etc;
- Pogo pin(connector) to establish a(usuallytemporary)connection between two printed circuit boards for charing, locating, Battery, Semiconductor & interconnectApplications;
- Double ended probef orBGA&semiconudtion testing;
- Universal pin without spring,coatingpin,LM pin withQZ&VZseries;

---High current probe,Switch probe,Capacitance needle...


---Terminal&receptacle/socket;

---Other related electronic compents,30#OKwire,Jig locks,POM,Ironhinge,etc

## Quality Control

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

## Packing Picture

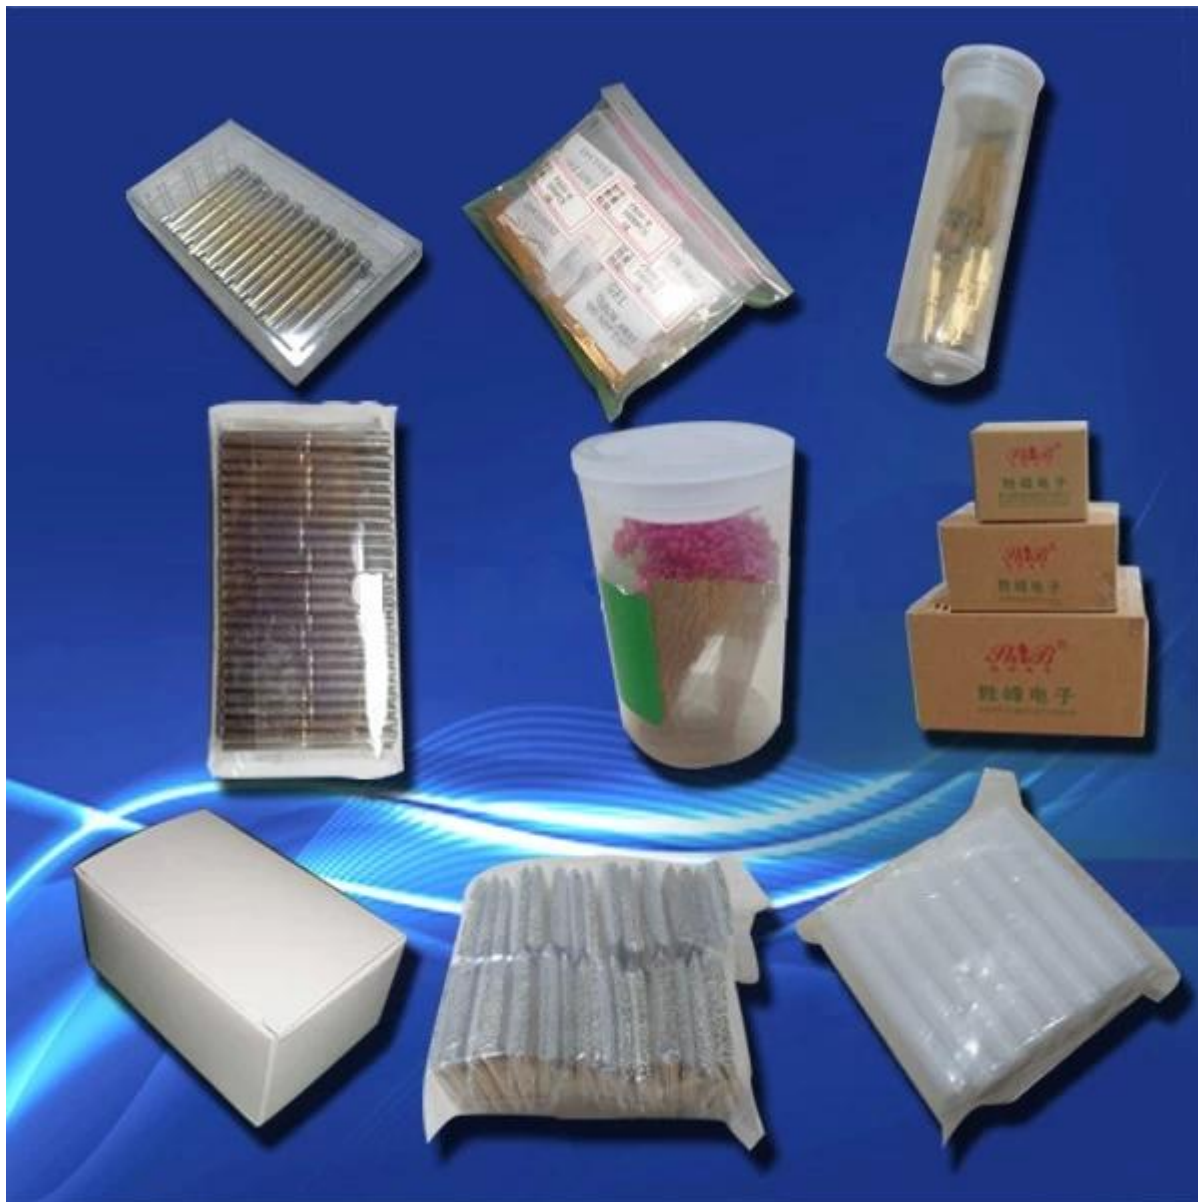

**Factory Image**

