


Switch probe SF-2.38x57.80-J

Product Picture

Switch probe model	Switch probe SF-2.38x57.80-J
Plunger material	1214 Iron, Au on Ni plated
Barrel material	Brass, Ni plated
Tail pin	1214 Iron, Au on Ni plated
Spring material	SUS
Spring force	250±20%gf @ load 4.6mm rated stroke
Full stroke	6.9mm
Packaging	Plastic box into cartons



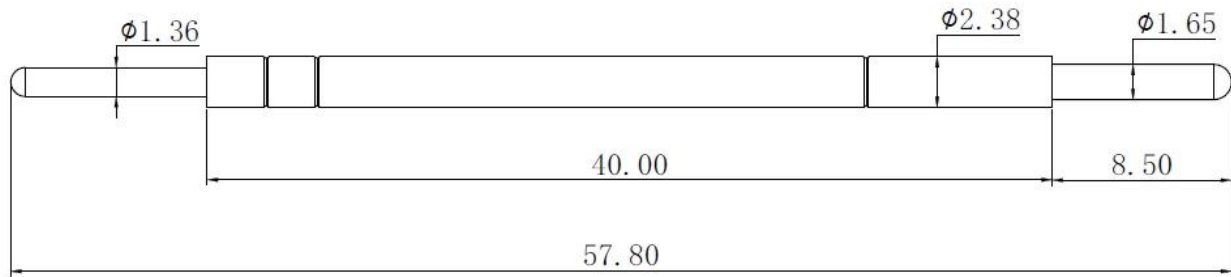

Our Service

1. We can reply your inquiry within 24 working hours.
2. Customized design is available and OEM are welcomed.
3. We can deliver the probe pins to our clients all over the world with speed and precision.
4. We can provide the lowest price with high quality product to our client .

Main Products

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;

Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Quality Control



1. Agilent current testing



2. Quadratic element




3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope

Packing Picture

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

