


# Production specifications

Item number	SF2346
Pitch	7.0mm
Temperature	ΔT□20℃
Spring force	3000g
Current	32Amp
Resistance	□10mΩ
MOQ	100PCS
Payment	T/T
Delivery time	5-10days after receiving the payment

# Product Pictures

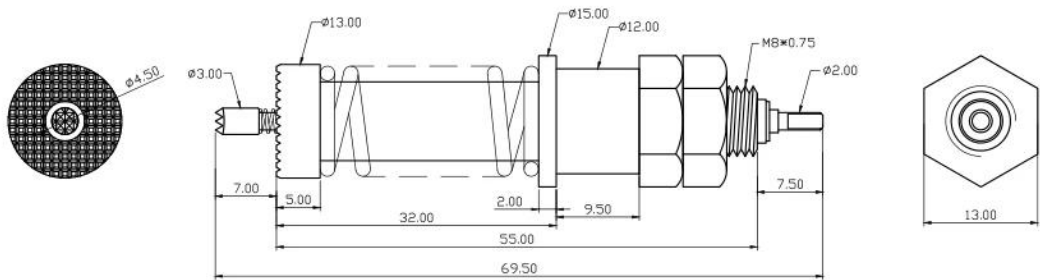

- 技术要求：
- 1. 探针要求头部镀金，镀金厚度0.02um；
  - 2. 内针装配时突出外针7mm, 内针初始压力为200g, 内针最大压缩量不小于7mm；
  - 3. 外针初始压力为800g, 当外针压缩7mm时压力在2800g-3500g之间；
  - 4. 内外针之间采用绝缘材料保证不短路。
  - 5. 大针整体采用黄铜，头部镀金，其余镀镍，弹簧不电镀，不锈钢线  
大针头部采用13\*13排梯形齿；  
内针采用铍铜制作，整体镀金，头部采用 3\*3排尖齿制作



## ***Production Flow***



1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products



6. Packing

## Testing Equipment

### Measuring Equipment >



#### Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test

## ***Packing***



## ***Main products***

- 1.Spring loaded pin(single)for PCB,ICT,FCTtesting etc;
- 2.Pogo pin(connector)to establish connection between two printed circuit boards for charging,locating,battery,semiconductor&interconnector applications;
- 3.Double ended probes for BGA and semiconductor testing;
- 4.Universal pin without spring,coating pin,LM pin with QZ and VZ series;
- 5.High current probe,switch probe,capacitance needle;
- 6.Terminal&receptacle/socket;
- 7.Other related electronic components,Jig locks,POM and etc.

Whatever you want,please contact us without hesitation ,and we will try our best to meet your requirement within our capability.

## ***Our service***

- 1.We can reply your inquiry within 24 working hours;
- 2.Customized design is available and OEM are welcomed;
- 3.We can deliver the probe pins to our clients all over the world with speed and precision.
- 4.We can provide the lowest price with high quality products to our clients.

