


## Product Specification

Brand	SFENG
Item number	SF-PH18
Recommended minimum center	4.30mm
Mounting hole size	3.50mm
Full travel	13.0mm
Spring Force	300g
Current ration	5A
Contace resistance	50mΩ

## Product Drawing


### SF-PH18-B3

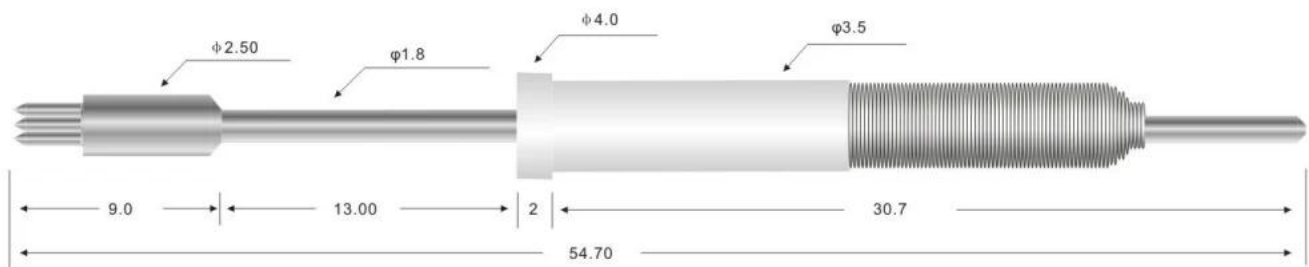


-B3




-A




-H



-U



-托针



## Our Service

1. We can reply your inquiry within 24 working hours.
2. Customized design is available and OEM are welcomed.
3. We can deliver the probe pins to our clients all over the world with speed and precision.
4. We can provide the lowest price with high quality product to our client .

## Main Products

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;

Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

## ***Product Equipment***

### **SOURCE MANUFACTURERS / QUALITY ASSURANCE**



## ***Factory Image***

