


Product Picture



SF-GP SeriesItem

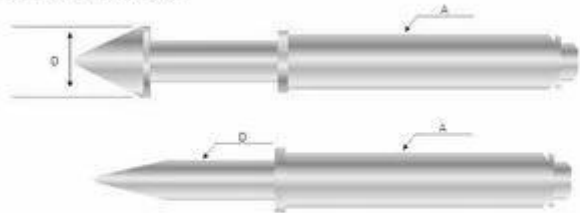

Item	Specification & Size				Drilling hole size
GP2.4	Barrel (A)	φ 2.4mm	Plunger (D)	φ 1.75mm	φ 2.40mm
GP3.2	Barrel (A)	φ 3.2mm	Plunger (D)	φ 2.50mm	φ 3.20mm
GP4.0	Barrel (A)	φ 4.0mm	Plunger (D)	φ 3.50mm	φ 4.00mm
GP5.0	Barrel (A)	φ 5.0mm	Plunger (D)	φ 4.00mm, φ 6.00mm	φ 5.00mm
GP5.2	Barrel (A)	φ 5.2mm	Plunger (D)	φ 4.00mm, φ 6.00mm	φ 5.20mm
GP6.0	Barrel (A)	φ 6.0mm	Plunger (D)	φ 5.00mm	φ 6.00mm

Our Service

- 1. We can reply your inquiry within 24 working hours.
- 2. Customized design is available and OEM are welcomed.
- 3. We can deliver the probe pins to our clients all over the world with speed and precision.
- 4. We can provide the lowest price with high quality product to our client .

Main Products

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;

Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Quality Control



Packing Picture

