


Production specifications

Item number	SF6536
Size	dia3.0*42.5mm
Material	Plunger:BeCu,Au on Ni plated Barrel:Brass, Au on Ni plated Insulation sleeve:PEEK Solder connection:BeCu, Au or Ni plated
Switch path	1.7mm
Full stroke	5.2mm
Spring force	Head:100~150g Tail:200~250g
MOQ	100PCS
Payment	T/T
Delivery time	5-15days after receiving the payment

Product Pictures

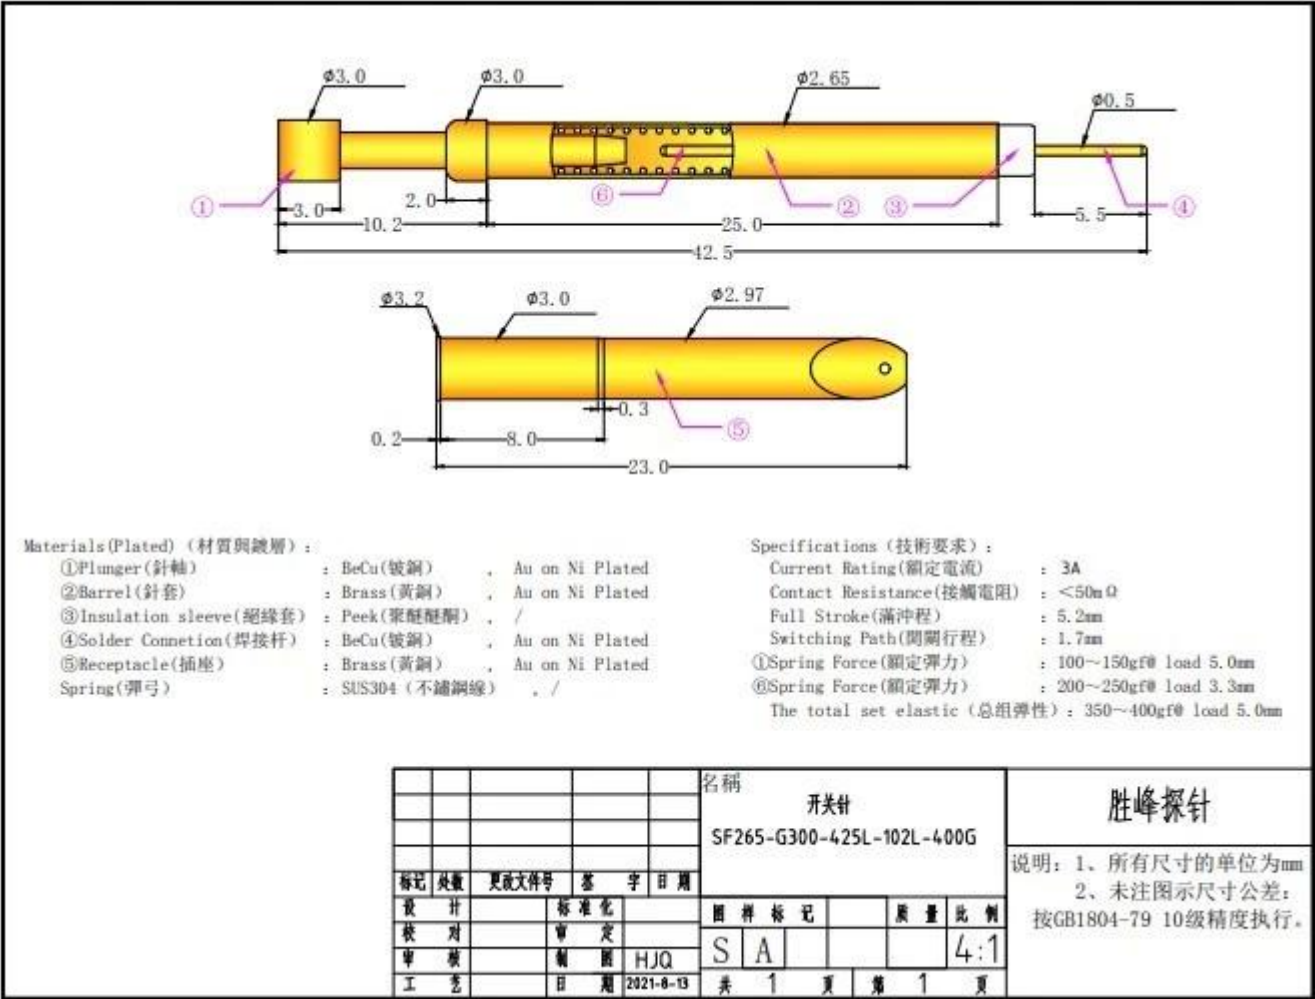

Production Flow



Production Flow (生产流程)



1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection





5. Finished products



6. Packing

Testing Equipment

Measuring Equipment ➤



Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test

Packing



Main products

- 1.Spring loaded pin(single)for PCB,ICT,FCTtesting etc;
- 2.Pogo pin(connector)to establish connection between two printed circuit boards for charging,locating,battery,semiconductor&interconnector applications;
- 3.Double ended probes for BGA and semiconductor testing;
- 4.Universal pin without spring,coating pin,LM pin with QZ and VZ series;
- 5.High current probe,switch probe,capacitance needle;
- 6.Terminal&receptacle/socket;
- 7.Other related electronic components,Jig locks,POM and etc.

Whatever you want,please contact us without hesitation ,and we will try our best to meet your requirement within our capability.

Our service

- 1.We can reply your inquiry within 24 working hours;
- 2.Customized design is availble and OEM are welcomed;
- 3.We can deliver the probe pins to our clients all over the world with speed and precision.
- 4.We can provide the lowest price with high quality products to our clients.