


## Double Head contact Pogo Pin Connector

Specification:

Brand	SFENG PROBE
Item Number	<b>Double head pogo pin</b> SF-0.45*25.8-BT
Material	Plunger : Becu / Au on Ni Plated Plunger : SK4 / Au on Ni Plated Barrel : PhBz / Au on Ni Plated Spring : SWP
Current Rating	0.5A
Contact Resistance	$\leq 100\text{m}\Omega$
Full Stroke	6.8mm
Rated Stroke	4.5mm
Spring force	$75\pm 20\%$
Cycle time	100,000times
MOQ	100PCS if we have stock
Lead time	2-15days after receiving the payment

Picture Show:

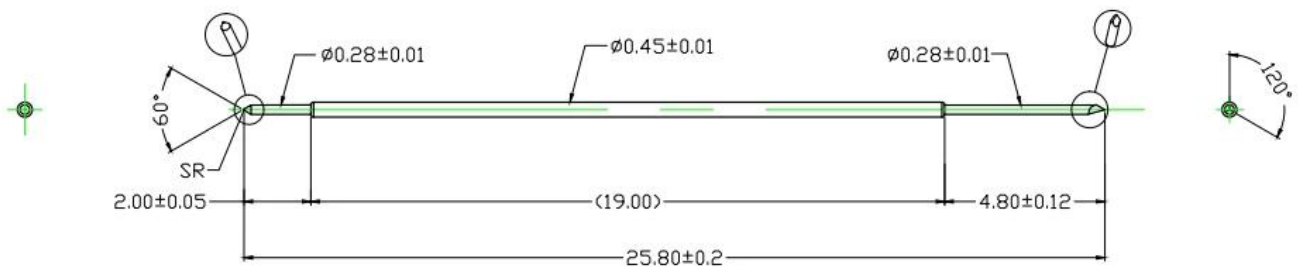







Our Advantages:

1. we have 30 years experience in probe pin and have our own factory.
2. we provide free sample and have a testing department.
3. we could manufacture products as your request.
4. we guarantee best price and good service.

Our Main Product:

Spring loaded pin (single) for PCB, ICT, FCT testing etc;  
Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;  
Double ended probe for BGA and Semiconductor testing;  
Universal pin without spring, coating pin, LM pin with QZ and VZ series;  
High current probe, Switch probe, Capacitance needle;  
Terminal & receptacle /socket;  
Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Testing Equipment:

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

Package:

