


Product Specification

Brand	SFENG
Item number	switching probes SF265- G300-5780L-1300L-250G-002
Size	according to the drawing
Lead time	about 3-7 working days



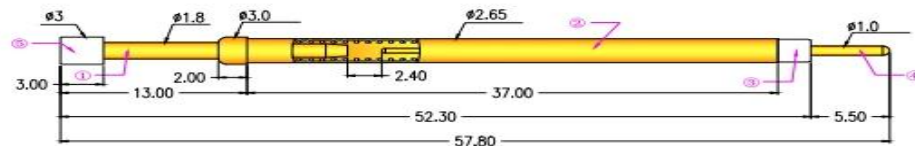

## Materials Plated (材質與鍍層) :

①Plunger (針軸)	: BeCu (鈹銅)	: Au on Ni Plated
②Barrel (針套)	: Brass (黃銅)	: Au on Ni Plated
③Insulation sleeve (絕緣套)	: Peek (聚醚醚酮)	: /
④Solder Connection (焊接杆)	: BeCu (鈹銅)	: Au on Ni Plated
⑤Tip (頭部)	: POM (賽鋼)	: /
Spring (彈弓)	: SWP (琴鋼線)	: Au on Ni Plated

## Specifications (技術要求) :

Current Rating (額定電流)	: 3A
Contact Resistance (接觸電阻)	: < 50mΩ
Full Stroke (滿行程)	: 7.0mm
Switching Path (開關行程)	: 2.4mm
Switch trip elastic (開關行程彈力)	: 0.9N @ load 2.4mm
Spring Force (額定彈力)	: 2.5N @ load 2/3

名稱	勝峰探針
料號	SF265-G300-5780L-1300L-250G-002
說明:	

## Our Service

1. We can reply your inquiry within 24 working hours.
2. Customized design is available and OEM are welcomed.
3. We can deliver the probe pins to our clients all over the world with speed and precision.
4. We can provide the lowest price with high quality product to our client .

## Main Products

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;

Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

## Quality Control

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

**Packing Picture**

