

# made in China standard size fine pitch spring probes center pitch 0.45mm


## Test probe(mm)

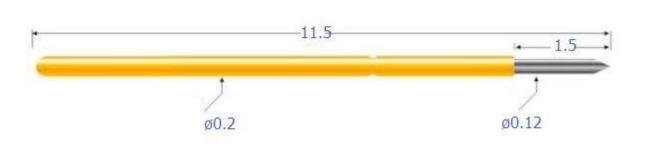

#### Receptacle(mm)



#### SF-R080-VR



SF-	-RC	080	-VF	RW
-				

<b>Mechanical Specification</b>	
Full travel:	1.5mm
Recommended Travel:	1.0mm
Spring Force@Recommended Travel:	15g

# **Materials and Plating**

Plunger	brass or Becu,gold plated on Nickel plated	
Barrel	brass,gold plated on Nickel plated	
Spring	steel or music wire, Nickel plated	
Receptacle	brass,gold plated on Nickel plated	

## **Electrical specification**

Current rating	0.3A
Resistance	260Ω