



## **Especificação do produto**


Marca	SFENG
Número de item	SF-P080
Desentupidor	Latão
Barril	Latão
primavera	Primavera
Força da primavera	15g
Viagem completa	1,5(0,0590""")
Ração Atual	0,3A
Resistência atual	50mW
Tom	0,45□0,0177""")
Tamanho do furo de montagem	0,35(0,0138""")
Quantidade mínima	100 peças
Tempo de espera	7 dias úteis após receber o pagamento

## **Imagem do produto**


# SF-P080




-J



SF-P080-B



SF-R080-VR

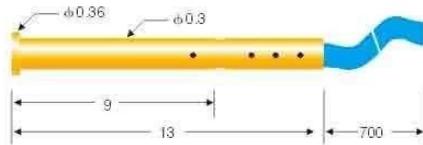

SF-R080-VRW

## Probe specifications SF-P080 (技术规格)

- Recommended minimum center(最小间距): 0.45mm(.0177")
- Mounting hole size(钻孔尺寸): 0.35mm(.0138")
- Full travel(行程): 1.5(.0590")
- Spring force(弹簧压力): 15g(克)
- Materials and finishes(材料及涂饰):  
Plunger:SK4,Rh plated  
Barrel:Phosphor bronze,Gold plated  
Spring:Music wire,Gold plated
- Current ration(额定电流): 0.3A(安培)
- Contact resistance(接触电阻): 260mΩ(毫欧姆)

### Receptacle specifications

Materials and finishes: Phosphor bronze, Gold plated

胜峰探针  
**SFENG**  
The China's The World's

RoHS

QUALITY ASSURED FIRM  
**ISO 9001**  
SGS

CE

chinapogopinsupplier.com

### ***Nosso serviço***

1. Podemos responder sua pergunta dentro de 24 horas úteis.
2. O design personalizado está disponível e o OEM é bem-vindo.
3. Podemos entregar os pinos da sonda para nossos clientes em todo o mundo com velocidade e precisão.
4. Podemos fornecer o menor preço com produtos de alta qualidade ao nosso cliente .

### ***Produtos Principais***

Pino com mola (único) para testes de PCB, ICT, FCT, etc;

Pino Pogo (conector) para estabelecer conexão entre duas placas de circuito impresso para aplicações de carregamento, localização, bateria, semicondutores e interconexão;

Sonda dupla para testes de BGA e semicondutores;


Pino universal sem mola, pino de revestimento, pino LM com séries QZ e VZ;

Sonda de alta corrente, sonda de comutação, agulha de capacitância;


Terminal e receptáculo/soquete;

Outros componentes eletrônicos relacionados, fio 30# OK, travas jig, POM, dobradiça de ferro etc.

## **Controle de qualidade**

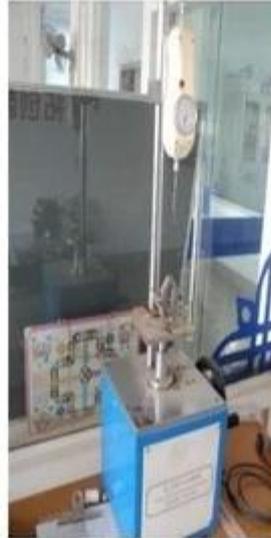Spring exhausted tester	DC power supply	Current resistance tester
 A large, white, industrial-grade cabinet with a glass door and a control panel on the right side.	 A white, rectangular device with a black front panel. It features a red emergency stop button, a power switch, and several output terminals. The text 'YoRi ADJUSTABLE DC POWER SUPPLY' is visible on the panel.	 A white, rectangular device with a large green digital display showing '8888'. It has a 'BLIND TEST' warning symbol and a circular dial on the right side.
Microscope	Tensile strength tester	Spring tester
 A white and black compound microscope with a stage, objective lenses, and an eyepiece.	 A blue and white mechanical testing machine with a vertical column and a sample holder.	 A white and blue mechanical testing machine with a digital display and a control panel.

## **Imagem da embalagem**

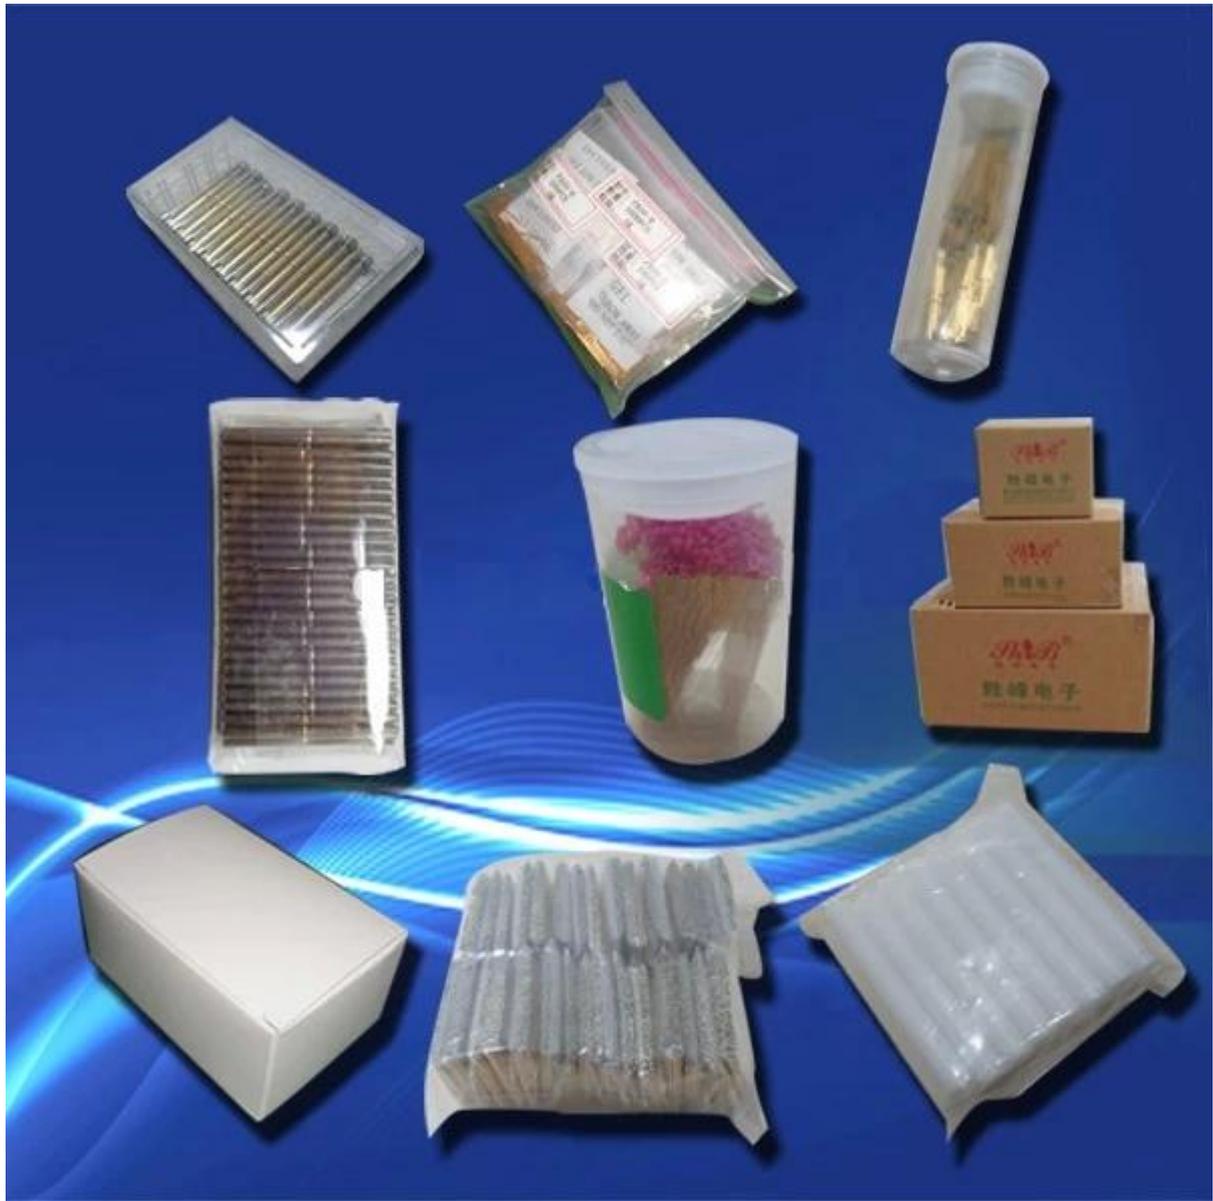

**Fábrica Imagem**

