


Conector Pogo Pin de contato de cabeça dupla

Especificação:

Marca	SFENSONDA
Número de item	Pin pogo de cabeça dupla SF-0,45*25,8-BT
Material	Êmbolo: Becu / Au em Ni banhado Êmbolo: SK4 / Au em Ni banhado Barril: PhBz / Au em Ni banhado Primavera: SWP
Classificação atual	0,5A
Contato de resistência	$\leq 100\text{m}\Omega$
Curso completo	6,8 mm
Curso avaliado	4,5 mm
Força da primavera	$75\pm 20\%$
Tempo de ciclo	100.000 vezes
Quantidade mínima	100 unidades se tivermos estoque
Tempo de espera	2-15 dias após receber o pagamento

Foto Mostrar:

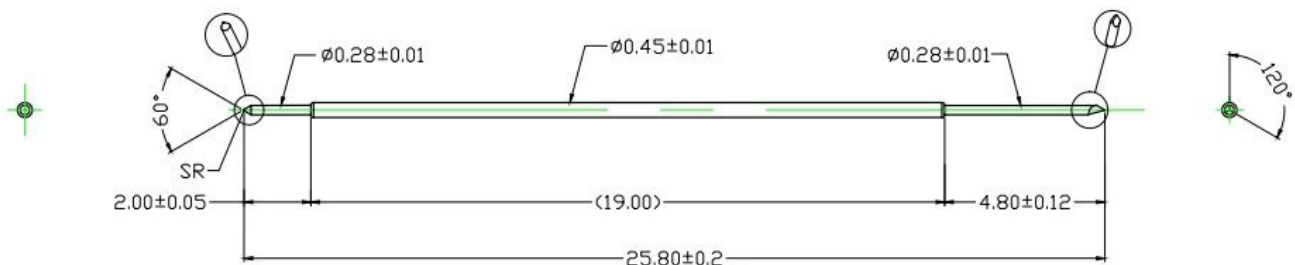







Nossas vantagens:

1. we have 30 years experience in probe pin and have ourself factory.
2. we provide free sample and have a testing department.
3. we could manufacture products as your request.
4. we guarantee best price and good service.

Nosso Principal Produto:

Spring loaded pin (single) for PCB, ICT, FCT testing etc;
Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;
Double ended probe for BGA and Semiconductor testing;
Universal pin without spring, coating pin, LM pin with QZ and VZ series;
High current probe, Switch probe, Capacitance needle;
Terminal & receptacle /socket;
Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Equipamento de teste:

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

Pacote:

