





Brass Gold chapeamento teste de sonda Pogo pino para o dispositivo de teste SF-P125

Introdução da empresa

Suzhou Shengteng Electronic Co., Ltd está especializando-se na ponta de prova da mola & no pino de Pogo com alta qualidade, baixo preço e entrega rápida. Nós temos nossa própria marca, nós nos dedicamos sempre a alcançar padrões internacionais, nossa companhia passaram a certificação ISO9001-2008 das gerências da qualidade e nossos produtos são qualificados de ROHS.

Teste pino SF-P125 desenho

SF-P125

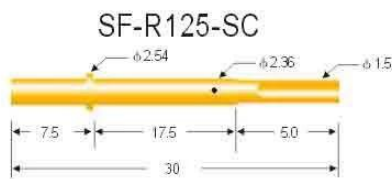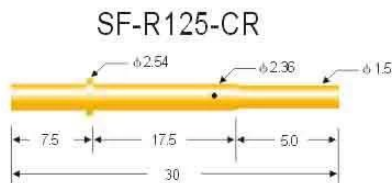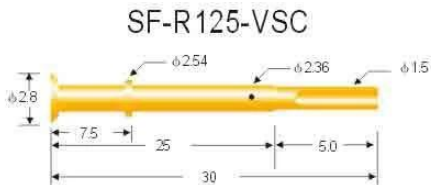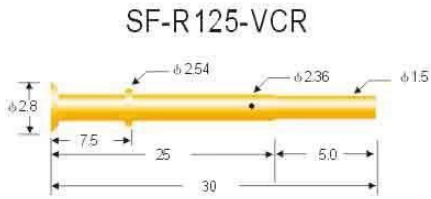

Probe specifications SF-P125(技术规格)

- Recommended minimum Spacing(最小间距): 3.17mm(.1248")
- Mounting hole size(钻孔尺寸):
压克力: 2.40mm(.0945")
电木板、玻璃纤维板: 2.45mm(.0965")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Ni plated;
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式):
Crimp: R125-VCR, R125-CR
Solder cup: R125-VSC, R125-SC
Material of receptacle: brass, gold plated

