


ICT Test Probe PH420*4850-H

Product Specification

Brand	SFENG
Item number	SF-PH420*4850-H
Material	Plunger: Ph Barrel: Brass Spring: SUS
Current Rating	15A
Contact Resistance	20mΩ
Spring Force	730±100gf @load 7.70mm
Rated Stroke	7.70mm
MOQ	100

Product Drawing

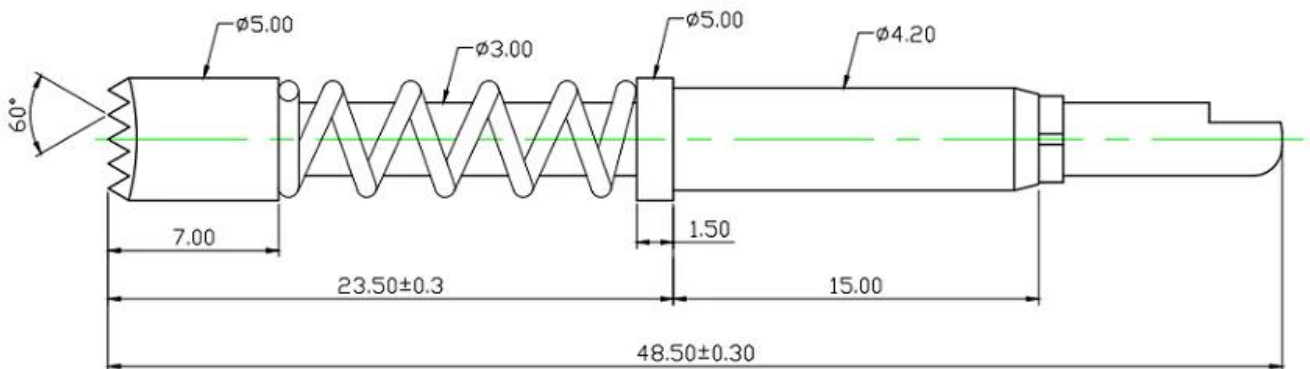

Our Service

1. We can reply your inquiry within 24 working hours.
2. Customized design is available and OEM are welcomed.
3. We can deliver the probe pins to our clients all over the world with speed and precision.
4. We can provide the lowest price with high quality product to our client .

Main Products

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;







Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Quality Control

Spring exhausted tester	DC power supply	Current resistance tester
 A tall, white industrial cabinet with a glass door, likely used for testing spring components.	 A white benchtop DC power supply unit with a digital display and several control knobs and buttons. The brand name 'YoRi' is visible.	 A white benchtop electronic testing device with a large green digital display showing '8888' and various control buttons.
Microscope	Tensile strength tester	Spring tester
 A white and black laboratory microscope with a camera attachment, used for inspecting small components.	 A blue and white mechanical testing machine used for measuring the tensile strength of materials.	 A white mechanical testing machine with a digital display, used for testing the properties of springs.

Packing Picture

