


## Product Specification

Brand	SFENG
Item number	double head pin SF-1.36*21.2-JJ
Material	Barrel: Brass, Au on Ni plated Plunger: Becu, Au on Ni plated Spring: SUS
Size	ø1.36*21.2mm
Current Ration	3A
Spring Force	70g±10gf @ load 4.30mm
Full stroke	6.50mm
Current Resistance	less than 80mohm
MOQ	100PCS
Payment term	100% TT in advance
Lead time	7 working days after receiving the payment

## Product drawing

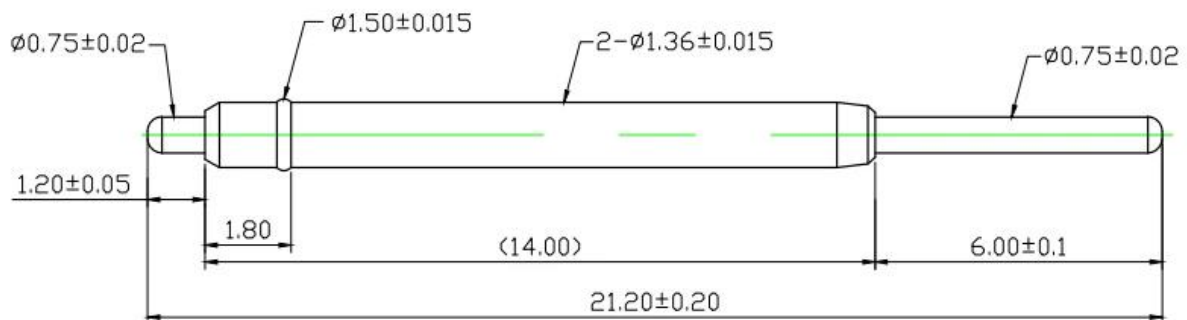

## Our Service







1. Reply your inquiry within 24 working hours
2. Customized design is available, OEM are welcomed
3. Delivery the probe pins to our clients all over the world with speed and precision
4. Provide the lowest price with high quality to our client

## Main Products

---Spring loaded pin(single) for PCB,ICT,FCT testing,etc;

- Pogo pin(connector) to establish a(usuallytemporary)connection between two printed circuit boards for charging, locating, Battery, Semiconductor & interconnectApplications;
- Double ended probeforBGA&semiconudtion testing;
- Universal pin without spring,coatingpin,LM pin withQZ&VZseries;
- High current probe,Switch probe,Capacitance needle...
- Terminal&receptacle/socket;
- Other related electronic compents,30#OKwire,Jig locks,POM,Ironhinge,etc

## Quality Control

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

## Packing Picture



## Factory Image

