


Specifications

Brand	SFENG
Model	Switching contact probe SF-6536
Plunger	Becu
Barrel	Brass
Spring	SUS304
Spring force	250g
Full travel	5.2 mm
Rated voltage	NO
Current Resistance	50mΩ
Spacing	NO
Mounting dimensions	NO
MOQ	100
delivery time	15 Days after confirming order

Product Image



Switching test probe drawing

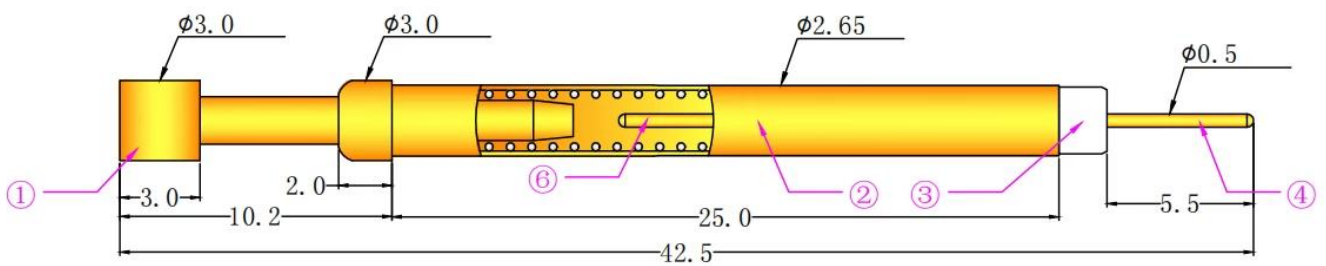

our service

1. Quick response.

2. Customized is accepted.
3. Short production time and fast delivery.
4. High quality and good price.

Main products

Spring-loaded pin (single) of PCB, ICT, FCT testing;

Spring pin (connector) to establish a connection between two printed circuit boards for charging, positioning, batteries, semiconductors and amplifiers; interconnect applications;

BGA and semiconductor test double-ended probe;

Universal pin no spring, paint needle, LM pin QZ and VZ series;

High current probe, the probe switches, capacitors needle;

Pier and amplifier; socket / socket;

Other related electronic components, 30 # OK line, jig lock, POM, iron hinges, etc.

Factory Image



Production process



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing

Testing equipment



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope

Packing & delivery

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

