


Product Specification

Brand	SFENG
Item number	SF-PA100-J0.75
Material	Barrel: Brass, Au on Ni plated Plunger: Ph, Au on Ni plated Spring: SWP, Au on Ni plated
Current Rating	3A
Contact Resistance	$\leq 50\text{m}\Omega$
Rated Stroke	4.3mm
Full Stroke	6.40mm
Spring force	180g \pm 35gf @ load 4.3mm 220g \pm 45gf @ load 6.4mm
Current Resistance	50mW
Packing	Plastic box and loaded into carton
Payment	T/T 100% in advance
MOQ	100 pcs
Lead time	7 working days after receiving the payment

Product Picture

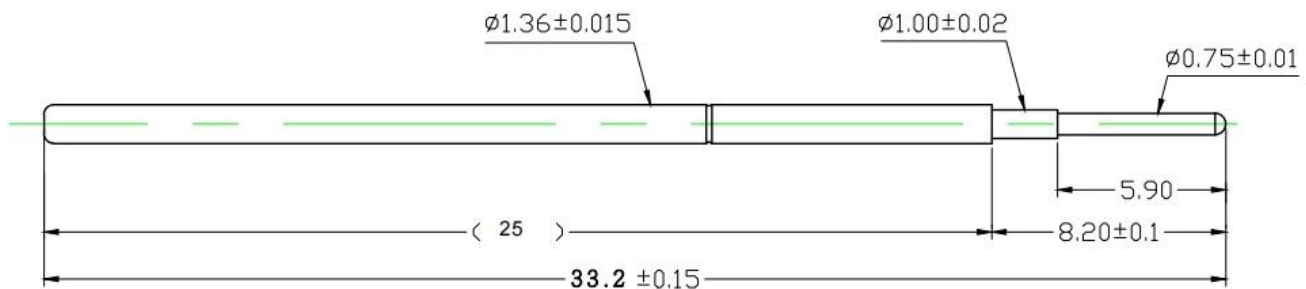

Our Service

1. We can reply your inquiry within 24 working hours.
2. Customized design is available and OEM are welcomed.
3. We can deliver the probe pins to our clients all over the world with speed and precision.
4. We can provide the lowest price with high quality product to our client .

Main Products

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Batt ery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;







Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Quality Control

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

Packing Picture

