

100 χιλιοστών ελατήριο με φορτίο ελατηρίου για δοκιμή PCB

Υλικό και τελειώματα

Βούρτσα: Χάλκινο ή Ορείχαλκο ή BeCu, επιχρυσωμένο ή επινικελωμένο.

Βαρέλι: Ορείχαλκος, επιχρυσωμένο ή επινικελωμένο.


Άνοιξη: Σύρμα από ανοξείδωτο χάλυβα ή μουσική.

Εικόνες

- Οποιοσδήποτε συμβουλές, θα μπορούσαμε να σας προσφέρουμε
- Αν σας ενδιαφέρει, επικοινωνήστε μαζί μου




SF-P100




SF-P100-E

Probe specifications SF-P100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(1000°)
- Mounting hole size(钻孔尺寸): 压克力: 1.70mm(.0670°) 电木板、玻璃纤维板: 1.75mm(.0689°)
- Full travel(行程): 6.40(.2520°)
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰): Plunger: Be Cu, Rh plated; SK4, Rh plated Barrel: Brass, Gold plated Spring: Stainless steel
- Current rating(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

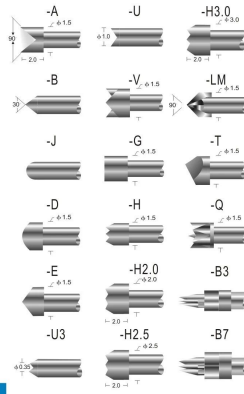

SF-R100

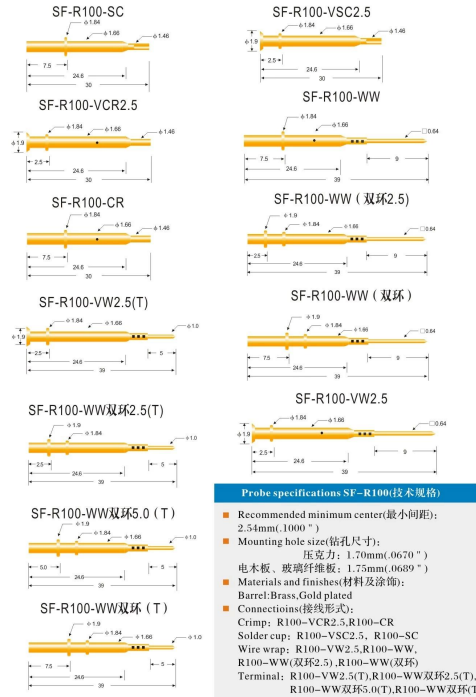

Probe specifications SF-R100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(1000°)
- Mounting hole size(钻孔尺寸): 压克力: 1.70mm(.0670°) 电木板、玻璃纤维板: 1.75mm(.0689°)
- Materials and finishes(材料及涂饰): Barrel: Brass, Gold plated
- Connections(接线形式): Crimp: R100-VCR2.5, R100-CR Solder cup: R100-VSC2.5, R100-SC Wire wrap: R100-VW2.5, R100-WW, R100-WW(双环2.5), R100-WW(双环)
- Terminal: R100-VW2.5(T), R100-WW双环2.5(T), R100-WW双环5.0(T), R100-WW双环(T)







Τα πλεονεκτήματά μας

1. Έχουμε 30 χρόνια εμπειρίας στην έρευνα καρφίτσα και έχουν εαυτό μας εργοστάσιο.
2. Παρέχουμε δωρεάν δείγμα και έχουμε ένα τμήμα δοκιμών.
3. Θα μπορούσαμε να κατασκευάσουμε τα προϊόντα ως αίτημά σας.
4. εγγυόμαστε την καλύτερη τιμή και καλή εξυπηρέτηση.

Το κύριο προϊόν μας

Spring loaded pin (single) for PCB, ICT, FCT testing etc;
Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;
Double ended probe for BGA and Semiconductor testing;
Universal pin without spring, coating pin, LM pin with QZ and VZ series;
High current probe, Switch probe, Capacitance needle;
Terminal & receptacle /socket;
Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Έλεγχος εξοπλισμού δοκιμών

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

Πακέτο

