

# Sonda de resorte de 100 mil para prueba de PCB

## Material y acabados.

Émbolo: Bronce o Latón o BeCu, chapado en oro o niquelado;

Barril: Latón, chapado en oro o niquelado;

Resorte: acero inoxidable o hilo musical;

## Imágenes

- Cualquier consejo, podríamos proporcionarle
- Si usted está interesado en ello, por favor póngase en contacto conmigo




## SF-P100




SF-P100-E

### Probe specifications SF-P100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000")
- Mounting hole size(钻孔尺寸): 压克力: 1.70mm(.0670")  
电木板、玻璃纤维板: 1.75mm(.0689")
- Full travel(行程): 6.40(.2520")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):  
Plunger: Be Cu, Rh plated; SK4, Rh plated  
Barrel: Brass, Gold plated  
Spring: Stainless steel
- Current rating(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

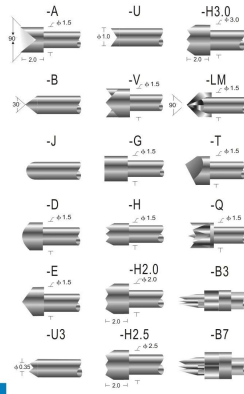

## SF-R100

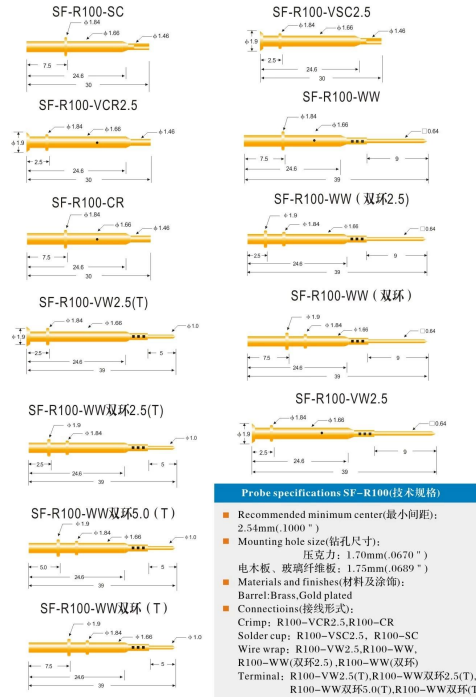

### Probe specifications SF-R100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000")
- Mounting hole size(钻孔尺寸): 压克力: 1.70mm(.0670")  
电木板、玻璃纤维板: 1.75mm(.0689")
- Materials and finishes(材料及涂饰):  
Barrel: Brass, Gold plated
- Connections(接线形式):  
Crimp: R100-VCR2.5, R100-CR  
Solder cup: R100-VSC2.5, R100-SC  
Wire wrap: R100-VW2.5, R100-WW  
R100-WW(双环2.5), R100-WW(双环)  
Terminal: R100-VW2.5(T), R100-WW双环2.5(T), R100-WW双环5.0(T), R100-WW双环(T)







## Nuestras ventajas

1. tenemos 30 años de experiencia en pin de sonda y tenemos fábrica de nosotros mismos.
2. proporcionamos muestras gratis y tenemos un departamento de pruebas.
3. podríamos fabricar productos como su petición.
4. garantizamos el mejor precio y buen servicio.

## Nuestro producto principal

Spring loaded pin (single) for PCB, ICT, FCT testing etc;  
Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;  
Double ended probe for BGA and Semiconductor testing;  
Universal pin without spring, coating pin, LM pin with QZ and VZ series;  
High current probe, Switch probe, Capacitance needle;  
Terminal & receptacle /socket;  
Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

**Control de equipos de prueba**

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

Paquete

